


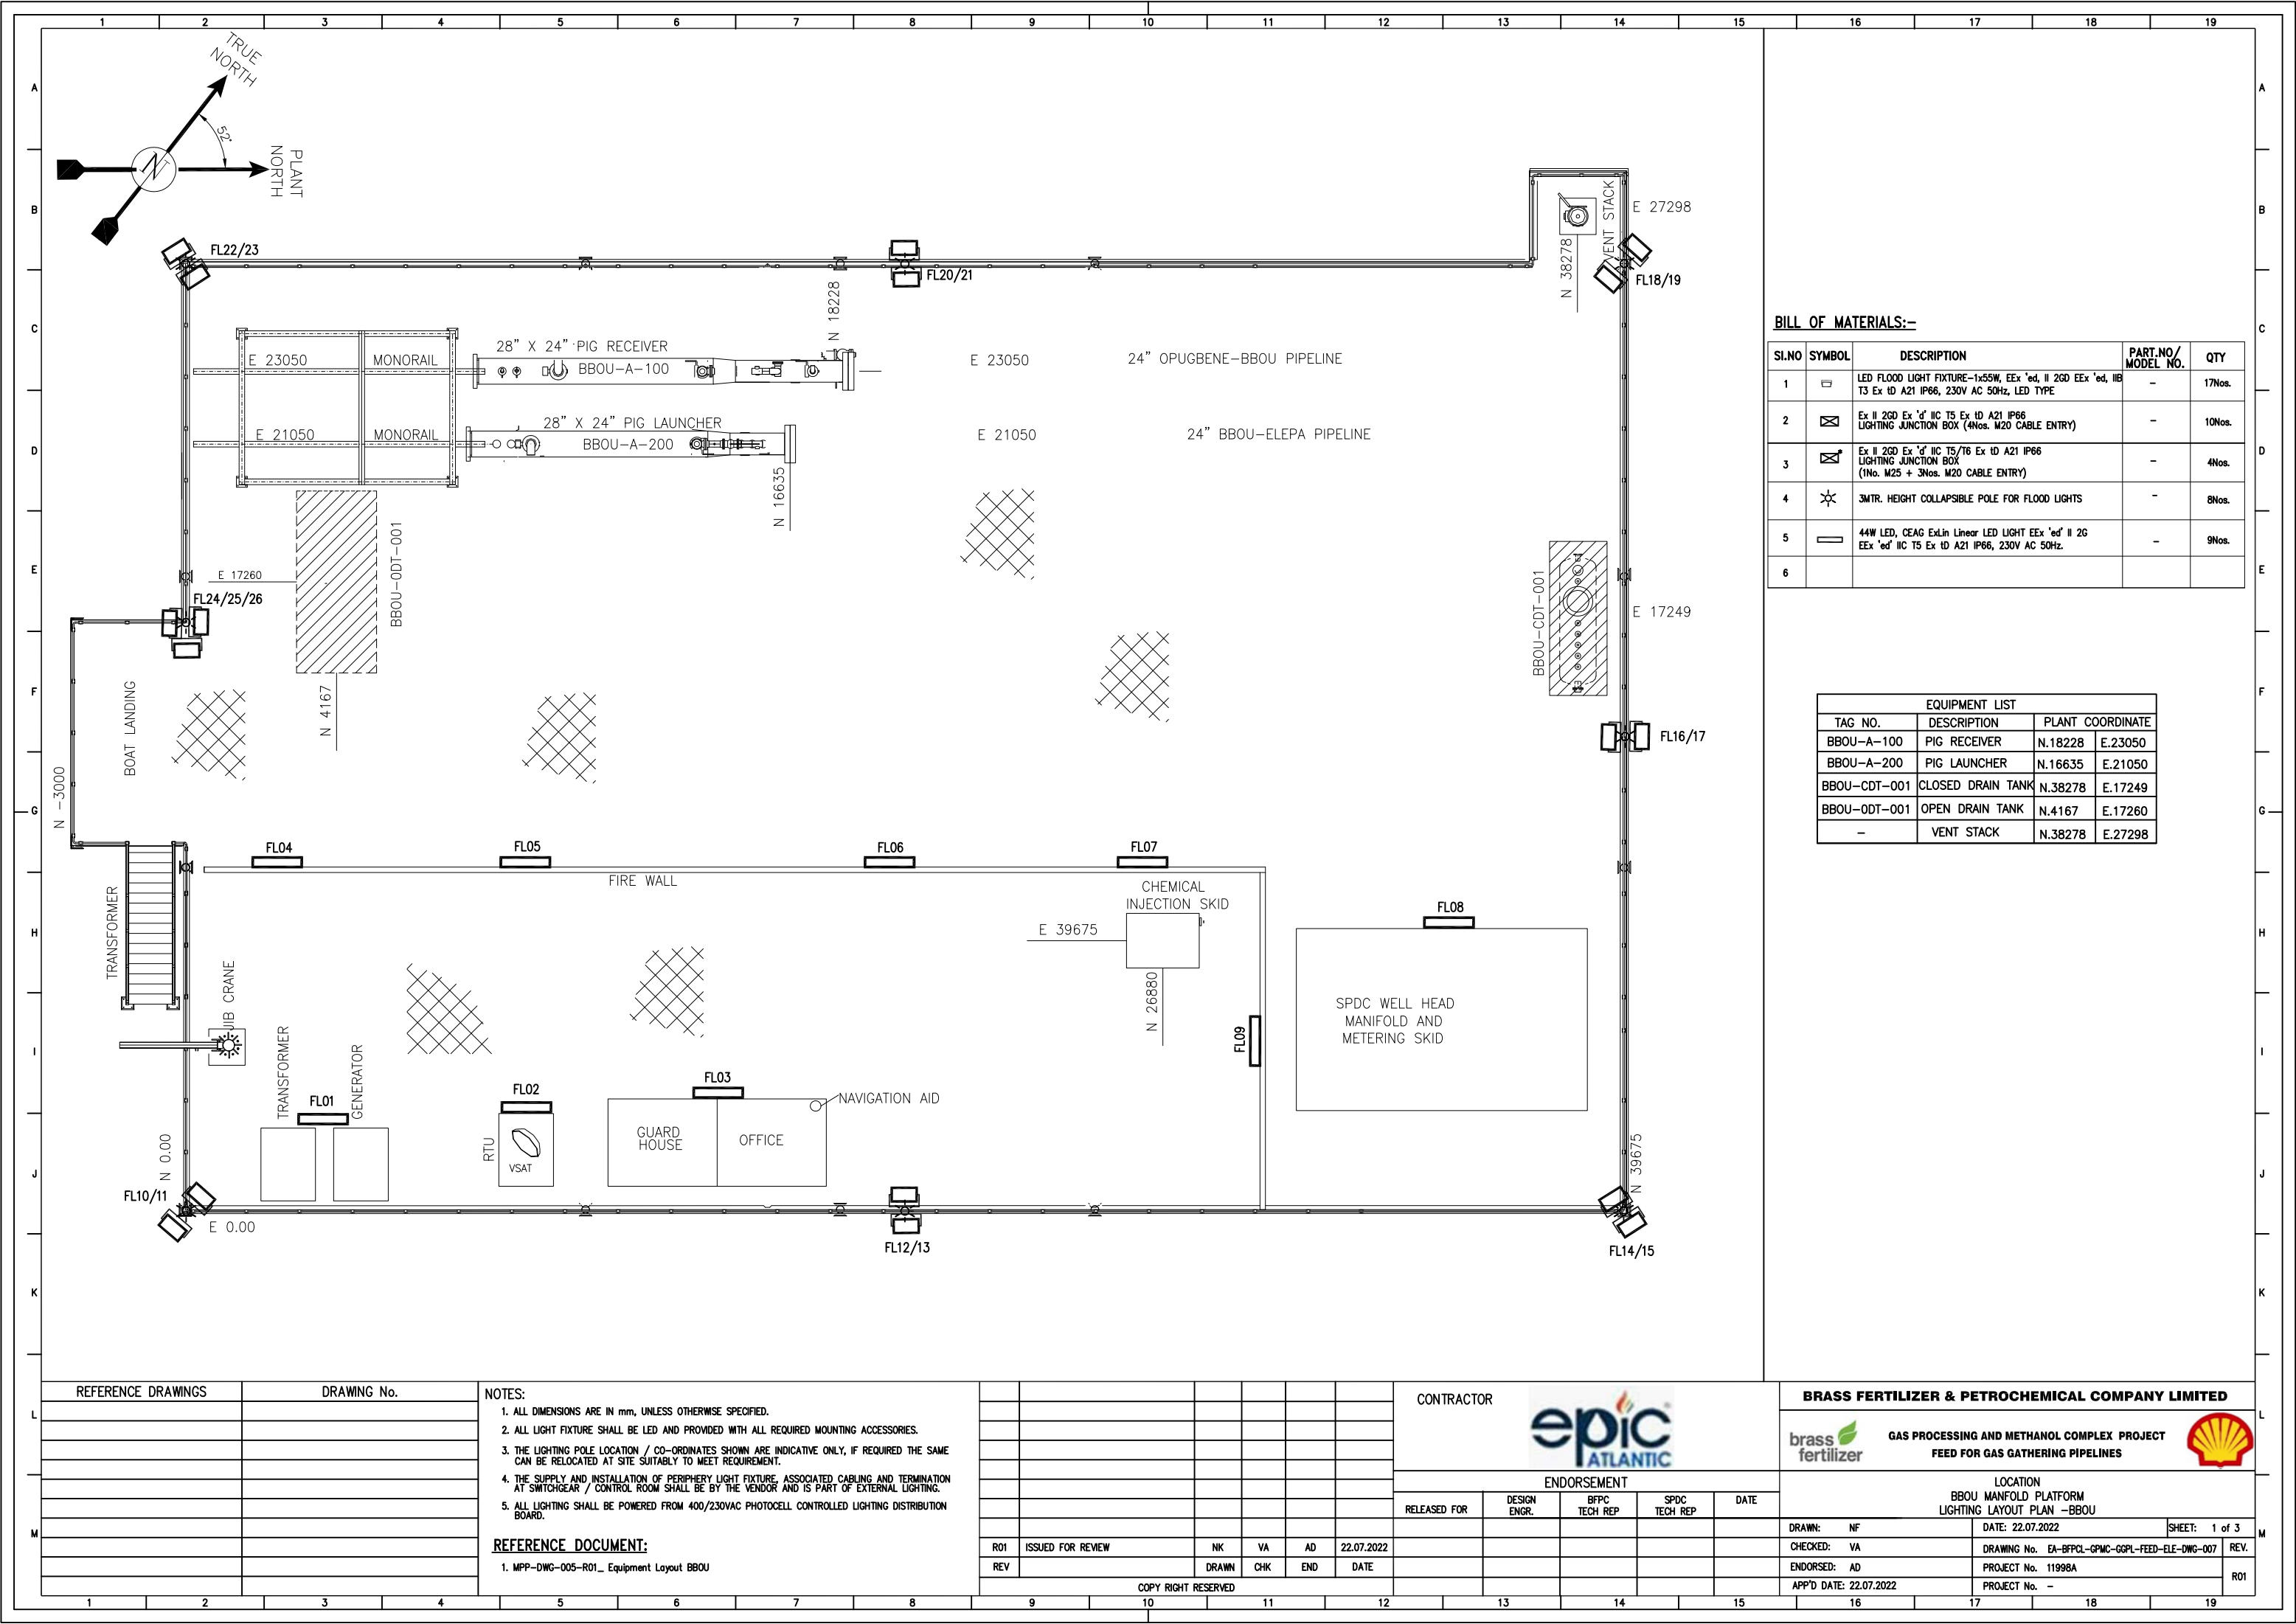

BILL OF MATERIALS:-

Sl.NO	SYMBOL	DESCRIPTION	PART.NO/ MODEL NO.	QTY
1		LED FLOOD LIGHT FIXTURE-1x55W, EEx 'ed, II 2GD EEx 'ed, IIB T3 Ex tD A21 IP66, 230V AC 50Hz, LED TYPE	-	17Nos.
2		Ex II 2GD Ex 'd' IIC T5 Ex tD A21 IP66 LIGHTING JUNCTION BOX (4Nos. M20 CABLE ENTRY)	-	10Nos.
3		Ex II 2GD Ex 'd' IIC T5/T6 Ex tD A21 IP66 LIGHTING JUNCTION BOX (1No. M25 + 3Nos. M20 CABLE ENTRY)	-	4Nos.
4		3MTR. HEIGHT COLLAPSIBLE POLE FOR FLOOD LIGHTS	-	8Nos.
5		44W LED, CEAG ExLin Linear LED LIGHT EEx 'ed' II 2G EEx 'ed' IIC T5 Ex tD A21 IP66, 230V AC 50Hz.	-	9Nos.
6				

EQUIPMENT LIST			
TAG NO.	DESCRIPTION	PLANT COORDINATE	
BBOU-A-100	PIG RECEIVER	N.18228	E.23050
BBOU-A-200	PIG LAUNCHER	N.16635	E.21050
BBOU-CDT-001	CLOSED DRAIN TANK	N.38278	E.17249
BBOU-ODT-001	OPEN DRAIN TANK	N.4167	E.17260
-	VENT STACK	N.38278	E.27298

NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS OTHERWISE SPECIFIED.
2. ALL LIGHT FIXTURE SHALL BE LED AND PROVIDED WITH ALL REQUIRED MOUNTING ACCESSORIES.
3. THE LIGHTING POLE LOCATION / CO-ORDINATES SHOWN ARE INDICATIVE ONLY, IF REQUIRED THE SAME CAN BE RELOCATED AT SITE SUITABLY TO MEET REQUIREMENT.
4. THE SUPPLY AND INSTALLATION OF PERIPHERY LIGHT FIXTURE, ASSOCIATED CABLING AND TERMINATION AT SWITCHGEAR / CONTROL ROOM SHALL BE BY THE VENDOR AND IS PART OF EXTERNAL LIGHTING.
5. ALL LIGHTING SHALL BE POWERED FROM 400/230VAC PHOTOCCELL CONTROLLED LIGHTING DISTRIBUTION BOARD.

REFERENCE DOCUMENT:

1. MPP-DWG-005-R01_ Equipment Layout BBOU

CONTRACTOR



ENDORSEMENT

RELEASED FOR	DESIGN ENGR.	BFPC TECH REP	SPDC TECH REP	DATE
R01 ISSUED FOR REVIEW	NK	VA	AD	22.07.2022
REV	DRAWN	CHK	END	DATE

BRASS FERTILIZER & PETROCHEMICAL COMPANY LIMITED




**GAS PROCESSING AND METHANOL COMPLEX PROJECT
FEED FOR GAS GATHERING PIPELINES**



**LOCATION
BBOU MANFOLD PLATFORM
LIGHTING LAYOUT PLAN -BBOU**

DRAWN: NF	DATE: 22.07.2022	SHEET: 1 of 3
CHECKED: VA	DRAWING No. EA-BFPCL-GPMC-GGPL-FEED-ELE-DWG-007	REV.
ENDORSED: AD	PROJECT No. 11998A	R01
APP'D DATE: 22.07.2022	PROJECT No. -	

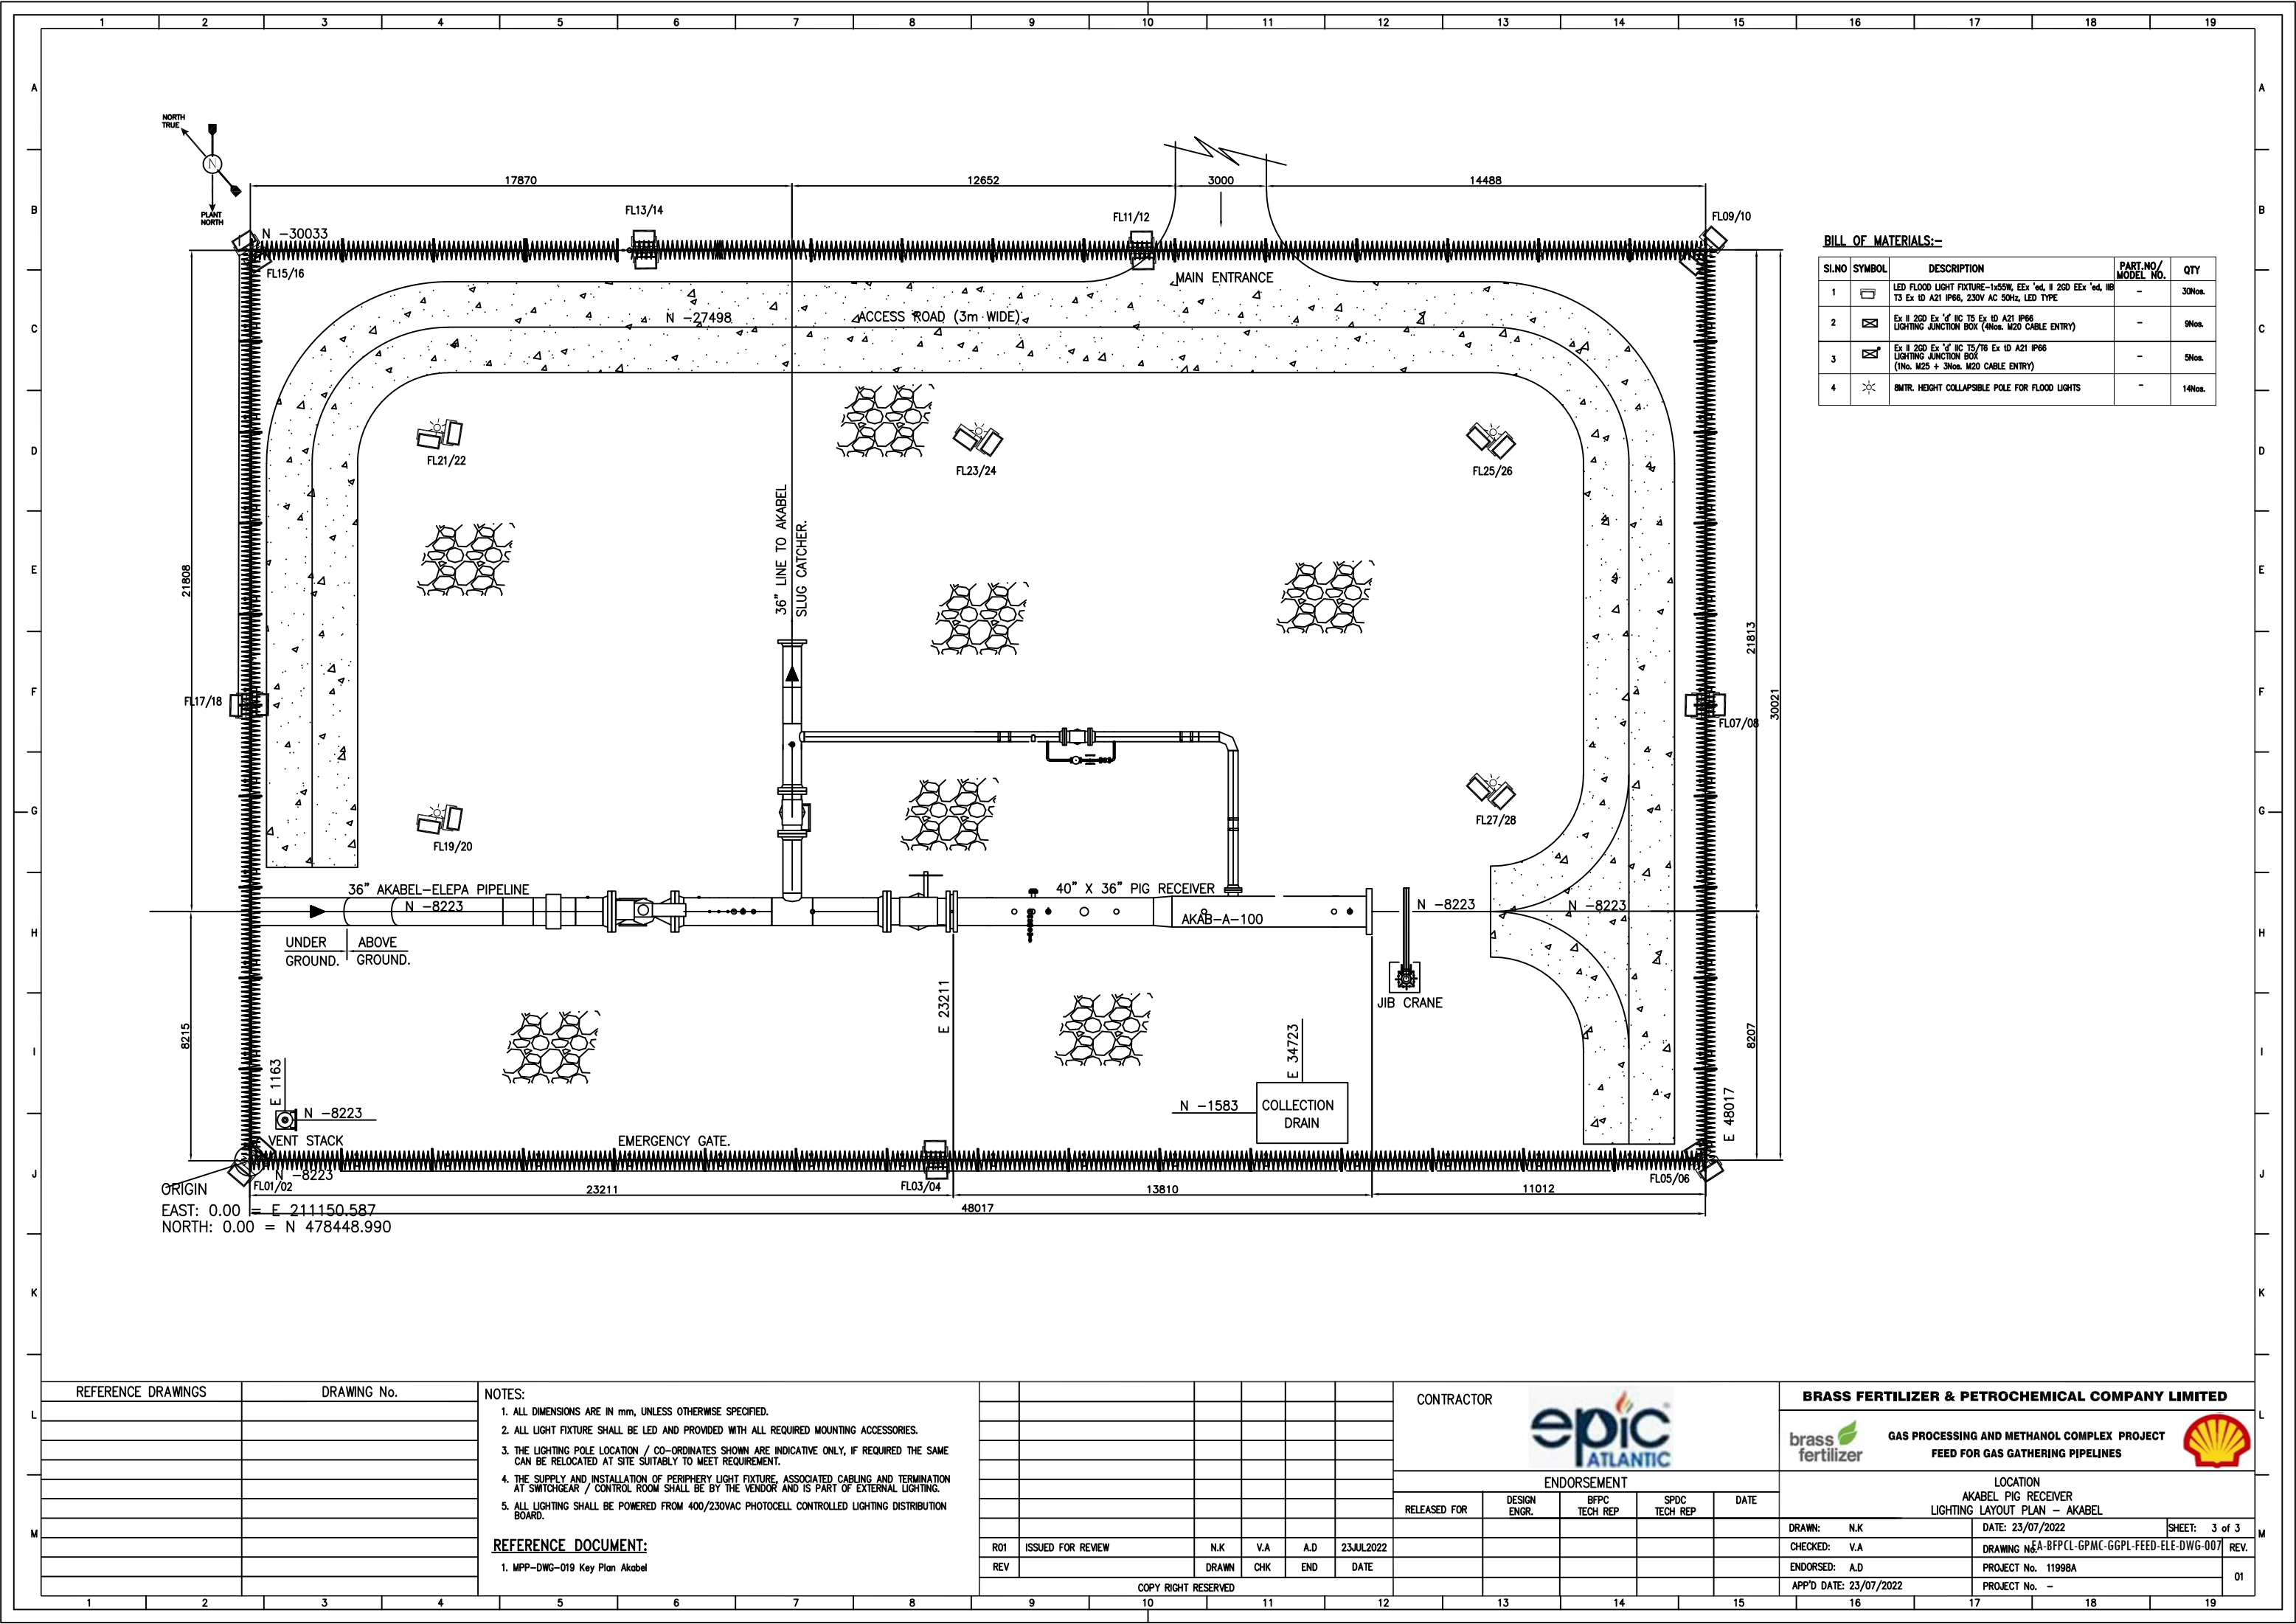

BILL OF MATERIALS:-

Sl.NO	SYMBOL	DESCRIPTION	PART.NO/ MODEL NO.	QTY
1		LED FLOOD LIGHT FIXTURE-1x55W, EE' 'ed, II 2GD EE' 'ed, II T3 Ex ID A21 IP66, 230V AC 50Hz, LED TYPE	-	30Nos.
2		Ex II 2GD Ex 'd' IIC T5 Ex ID A21 IP66 LIGHTING JUNCTION BOX (4Nos. M20 CABLE ENTRY)	-	9Nos.
3		Ex II 2GD Ex 'd' IIC T5/T6 Ex ID A21 IP66 LIGHTING JUNCTION BOX (4Nos. M20 CABLE ENTRY)	-	5Nos.
4		BMTR. HEIGHT COLLAPSIBLE POLE FOR FLOOD LIGHTS	-	14Nos.

- NOTES:
- ALL DIMENSIONS ARE IN mm, UNLESS OTHERWISE SPECIFIED.
 - ALL LIGHT FIXTURE SHALL BE LED AND PROVIDED WITH ALL REQUIRED MOUNTING ACCESSORIES.
 - THE LIGHTING POLE LOCATION / CO-ORDINATES SHOWN ARE INDICATIVE ONLY, IF REQUIRED THE SAME CAN BE RELOCATED AT SITE SUITABLY TO MEET REQUIREMENT.
 - THE SUPPLY AND INSTALLATION OF PERIPHERY LIGHT FIXTURE, ASSOCIATED CABLING AND TERMINATION AT SWITCHGEAR / CONTROL ROOM SHALL BE BY THE VENDOR AND IS PART OF EXTERNAL LIGHTING.
 - ALL LIGHTING SHALL BE POWERED FROM 400/230VAC PHOTOCELL CONTROLLED LIGHTING DISTRIBUTION BOARD.
- REFERENCE DOCUMENT:
- MPP-DWG-019 Key Plan Akabel

CONTRACTOR

BRASS FERTILIZER & PETROCHEMICAL COMPANY LIMITED

GAS PROCESSING AND METHANOL COMPLEX PROJECT
FEED FOR GAS GATHERING PIPELINES

ENDORSEMENT

RELEASED FOR	DESIGN ENGR.	BFPC TECH REP	SPDC TECH REP	DATE

LOCATION
AKABEL PIG RECEIVER
LIGHTING LAYOUT PLAN - AKABEL

DRAWN: N.K	DATE: 23/07/2022	SHEET: 3 of 3
CHECKED: V.A	DRAWING No. A-BFPC-L-GPMC-GGPL-FEED-ELE-DWG-007	REV.
ENDORSED: A.D	PROJECT No. 11998A	
APP'D DATE: 23/07/2022	PROJECT No. -	01