


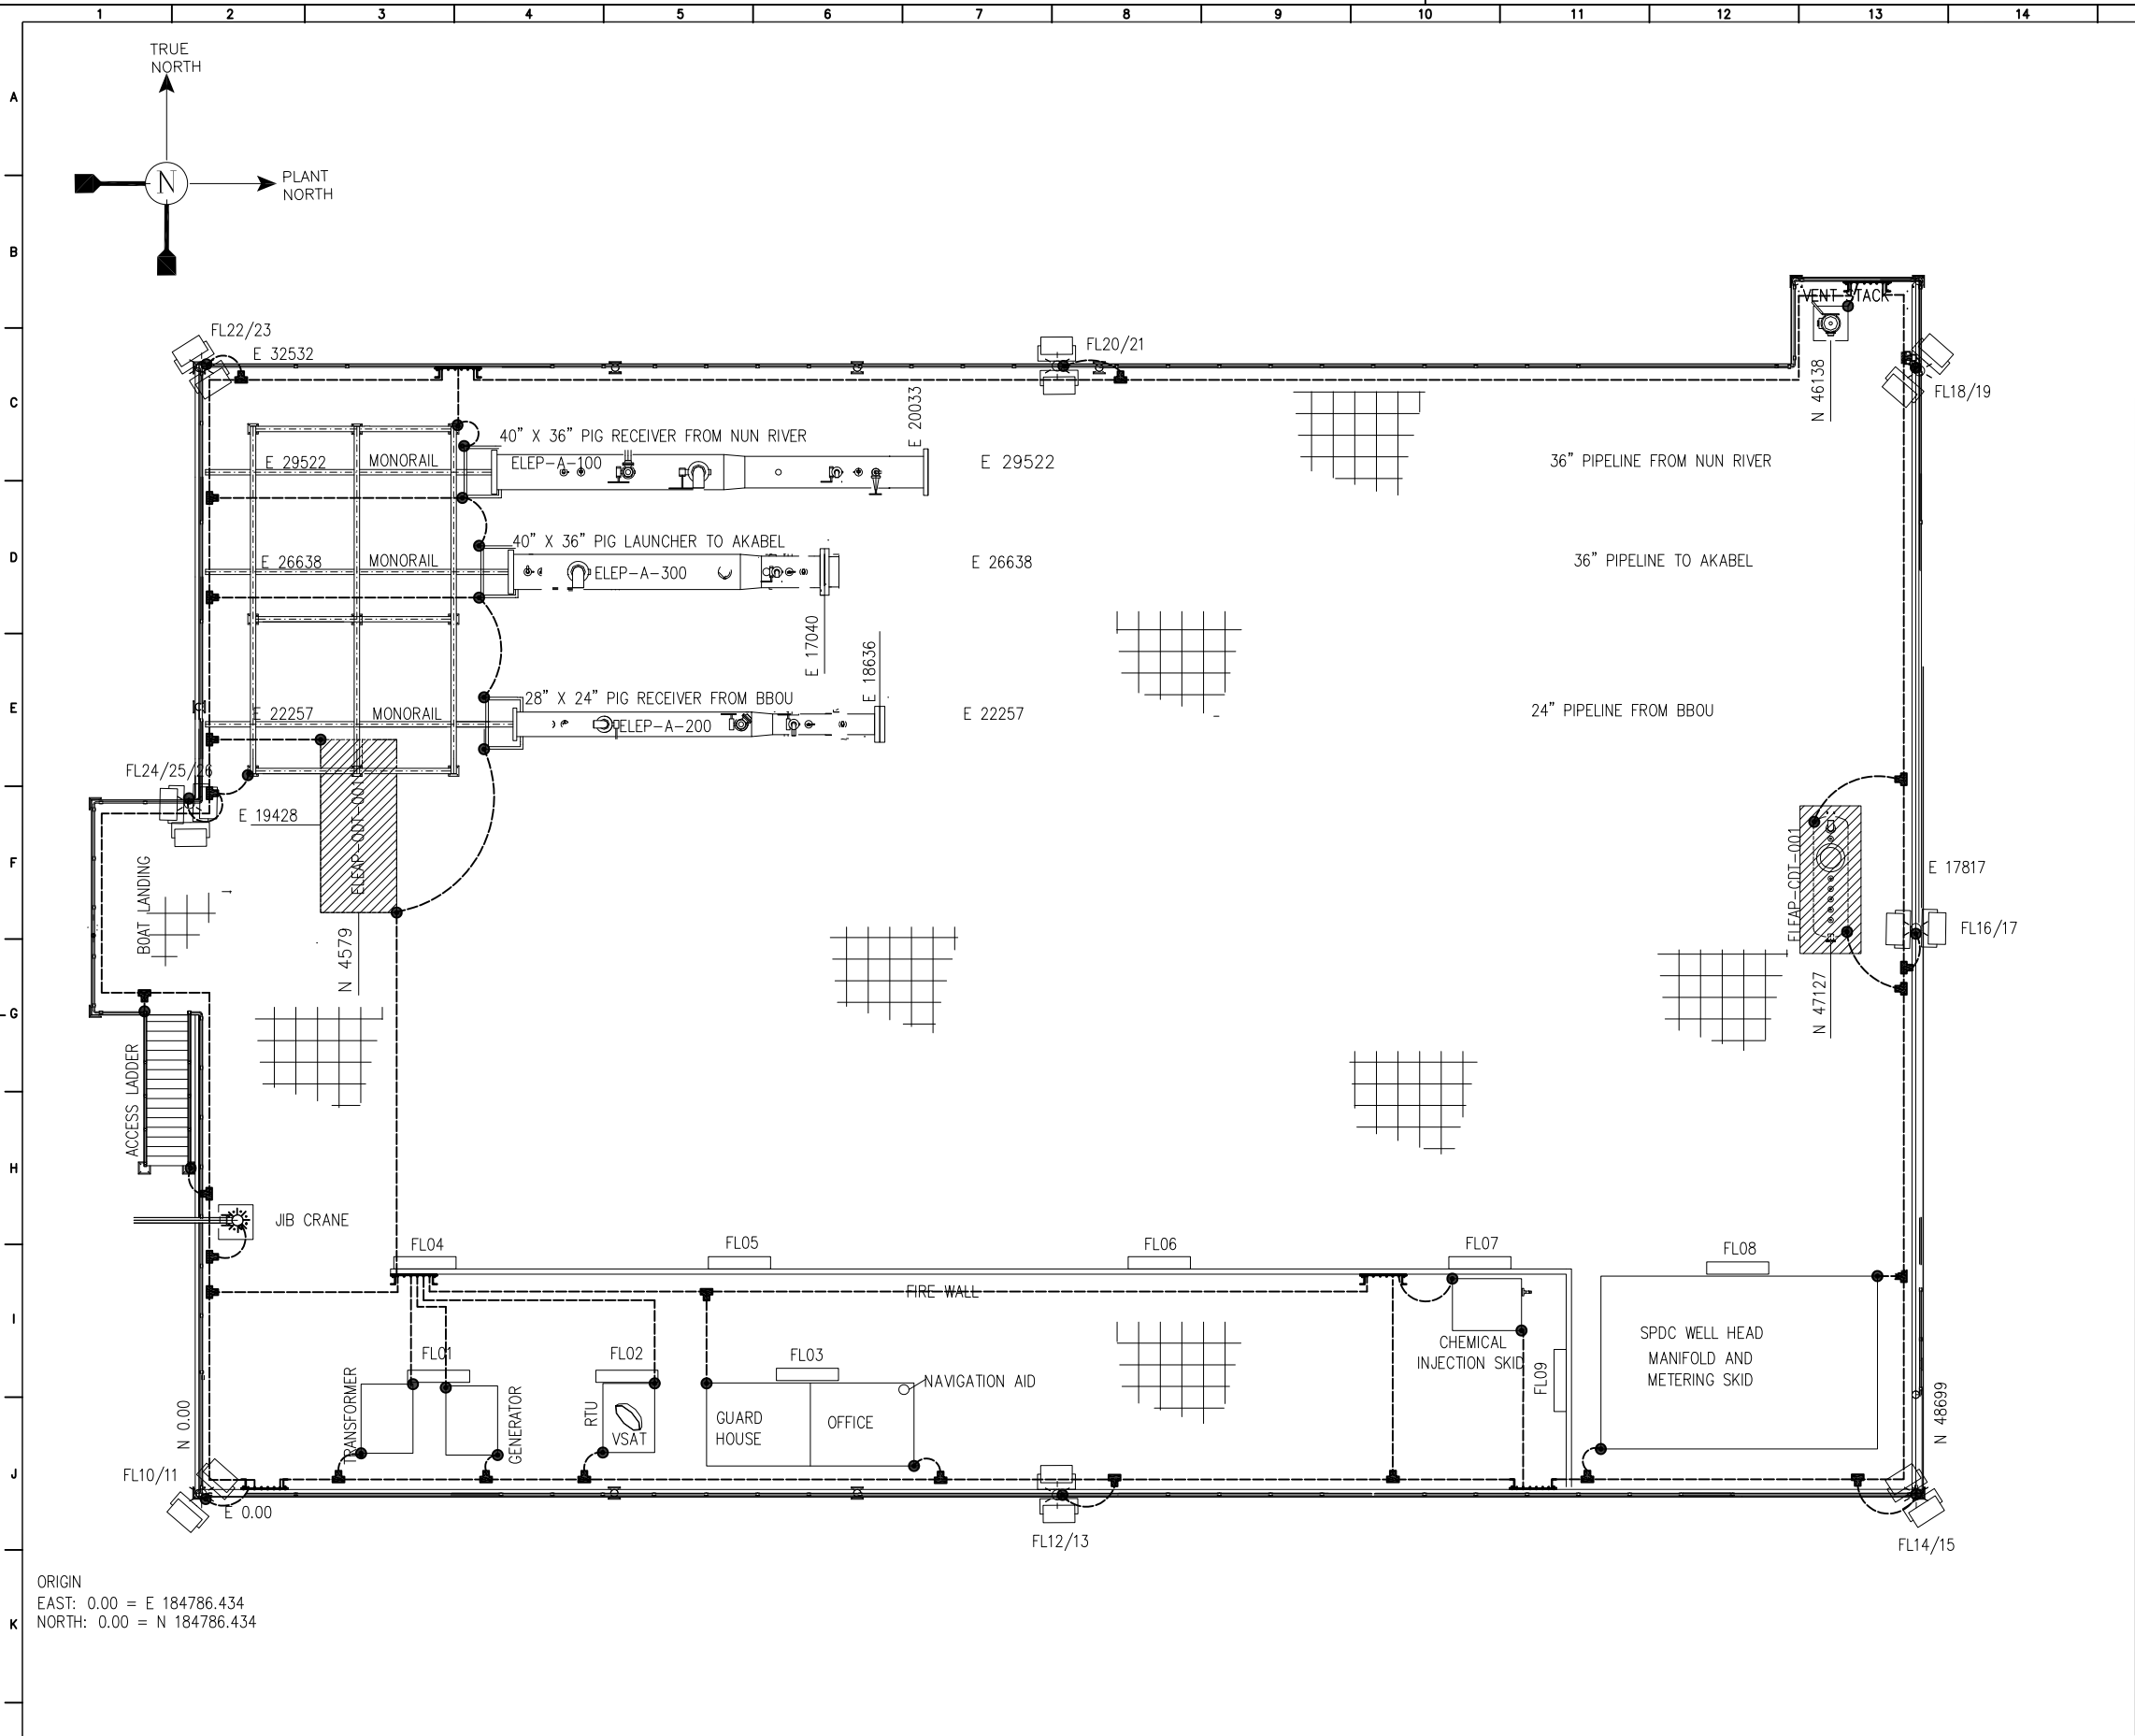


- NOTES:-**
- ALL DIMENSIONS ARE IN mm AND LEVELS IN METERS UNLESS SPECIFIED OTHERWISE .
 - EARTHING BUS SHALL BE COPPER BOND EARTH BUS.
 - GROUNDING GRID CONDUCTOR SHALL BE LAID IN CABLE TRAY BELOW FLOOR..
 - INSTALLATION OF EARTHING GRID & CONNECTIONS SHALL BE IN COMPLIANCE WITH IEEE-80 & IEEE-142.
 - ALL METALLIC PARTS (STRUCTURES, STAIRS, VESSELS, ETC.) SHALL BE GENERALLY GROUNDED AT TWO POINTS. PIPE SLEEPER SHALL BE EARTHED AT 25MTR INTERVAL.
 - GROUNDING CONDUCTOR UNDER/IN CONCRETE SHALL BE LAID IN UPVC CONDUIT.
 - ALL EARTHING CABLES SHALL BE PVC INSULATED (YELLOW/GREEN) STRANDED COPPER CONDUCTOR.
 - LOCATION OF EARTHING CABLE & CONNECTION TO EACH EQUIPMENT IS INDICATIVE ONLY. ACTUAL LOCATION SHALL BE DECIDED AT SITE.
 - NO. OF EARTH BUS AND CONNECTION TO PILE STRUCTURE DECIDED IN SUCH A WAY THAT, SYSTEM EARTHING RESISTANCE SHALL BE $\leq 4\Omega$.
 - INDELEC PREVECTRON LIGHTNING ARRESTOR SHALL BEE PROVIDED ON ELECTRICAL OR TELECOM MAST.
 - ALL ELECTRICAL, INSTRUMENTATION & METALLIC EQUIPMENT IN THE ELECTRICAL ROOM TO BE BONDED.

- REFERENCE DOCUMENT:**
- EQUIPMENT LAYOUT PLAN: EA-BFPCL-GPMC-GGPL-FEED-MPP-DWG-006.


BILL OF MATERIALS

SL.NO.	SYMBOL	DESCRIPTION	QTY. (APPROXIMATE)
1	-----	70 mm ² PVC INSULATED YELLOW/GREEN COPPER CABLE	271Mtrs.
2		COMPRESSION CONNECTOR-70 TO 70 mm ² 3-WAY	24Nos.
3		8-WAY ELECTRICAL EARTH BUS.	6Nos.
4		EQUIPMENT CONNECTION NODE WITH BOLTED BRANCH	37Nos.

EQUIPMENT LIST			
TAG NO.	DESCRIPTION	PLANT COORDINATE	
ELEP-A-100	PIG RECEIVER	E.29522	N.20033
ELEP-A-300	PIG LAUNCHER	E.26638	N.17040
ELEP-A-200	PIG RECEIVER	E.22257	N.18636
ELEP-CDT-001	CLOSED DRAIN TANK	E.17817	N.47127
ELEP-ODT-001	OPEN DRAIN TANK	E.19428	N.4613
-	VENT STACK	E.33817	N 46138

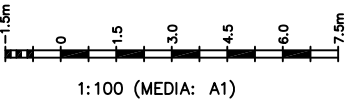

L	REFERENCE DRAWINGS	DRAWING No.	NOTES:							CONTRACTOR 	BRASS FERTILIZER & PETROCHEMICAL COMPANY LIMITED							
											 GAS PROCESSING AND METHANOL COMPLEX PROJECT FEED FOR GAS GATHERING PIPELINES 							
											LOCATION ELEPA MANFOLD PLATFORM EARTHING LAYOUT PLAN – ELEPA							
M											RELEASED FOR	DESIGN ENGR.	BFPCL TECH REP	SPDC TECH REP	DATE	DRAWN: N.K	DATE: 22/07/2022	SHEET: 2 of 3
																CHECKED: V.A	DRAWING No. EA-BFPCL-GPMC-GGPL-FEED-ELE-DWG-011	REV.
																ENDORSED: A.D	PROJECT No. 11998A	
																APP'D DATE: 22JUL2022	PROJECT No. –	
										</								

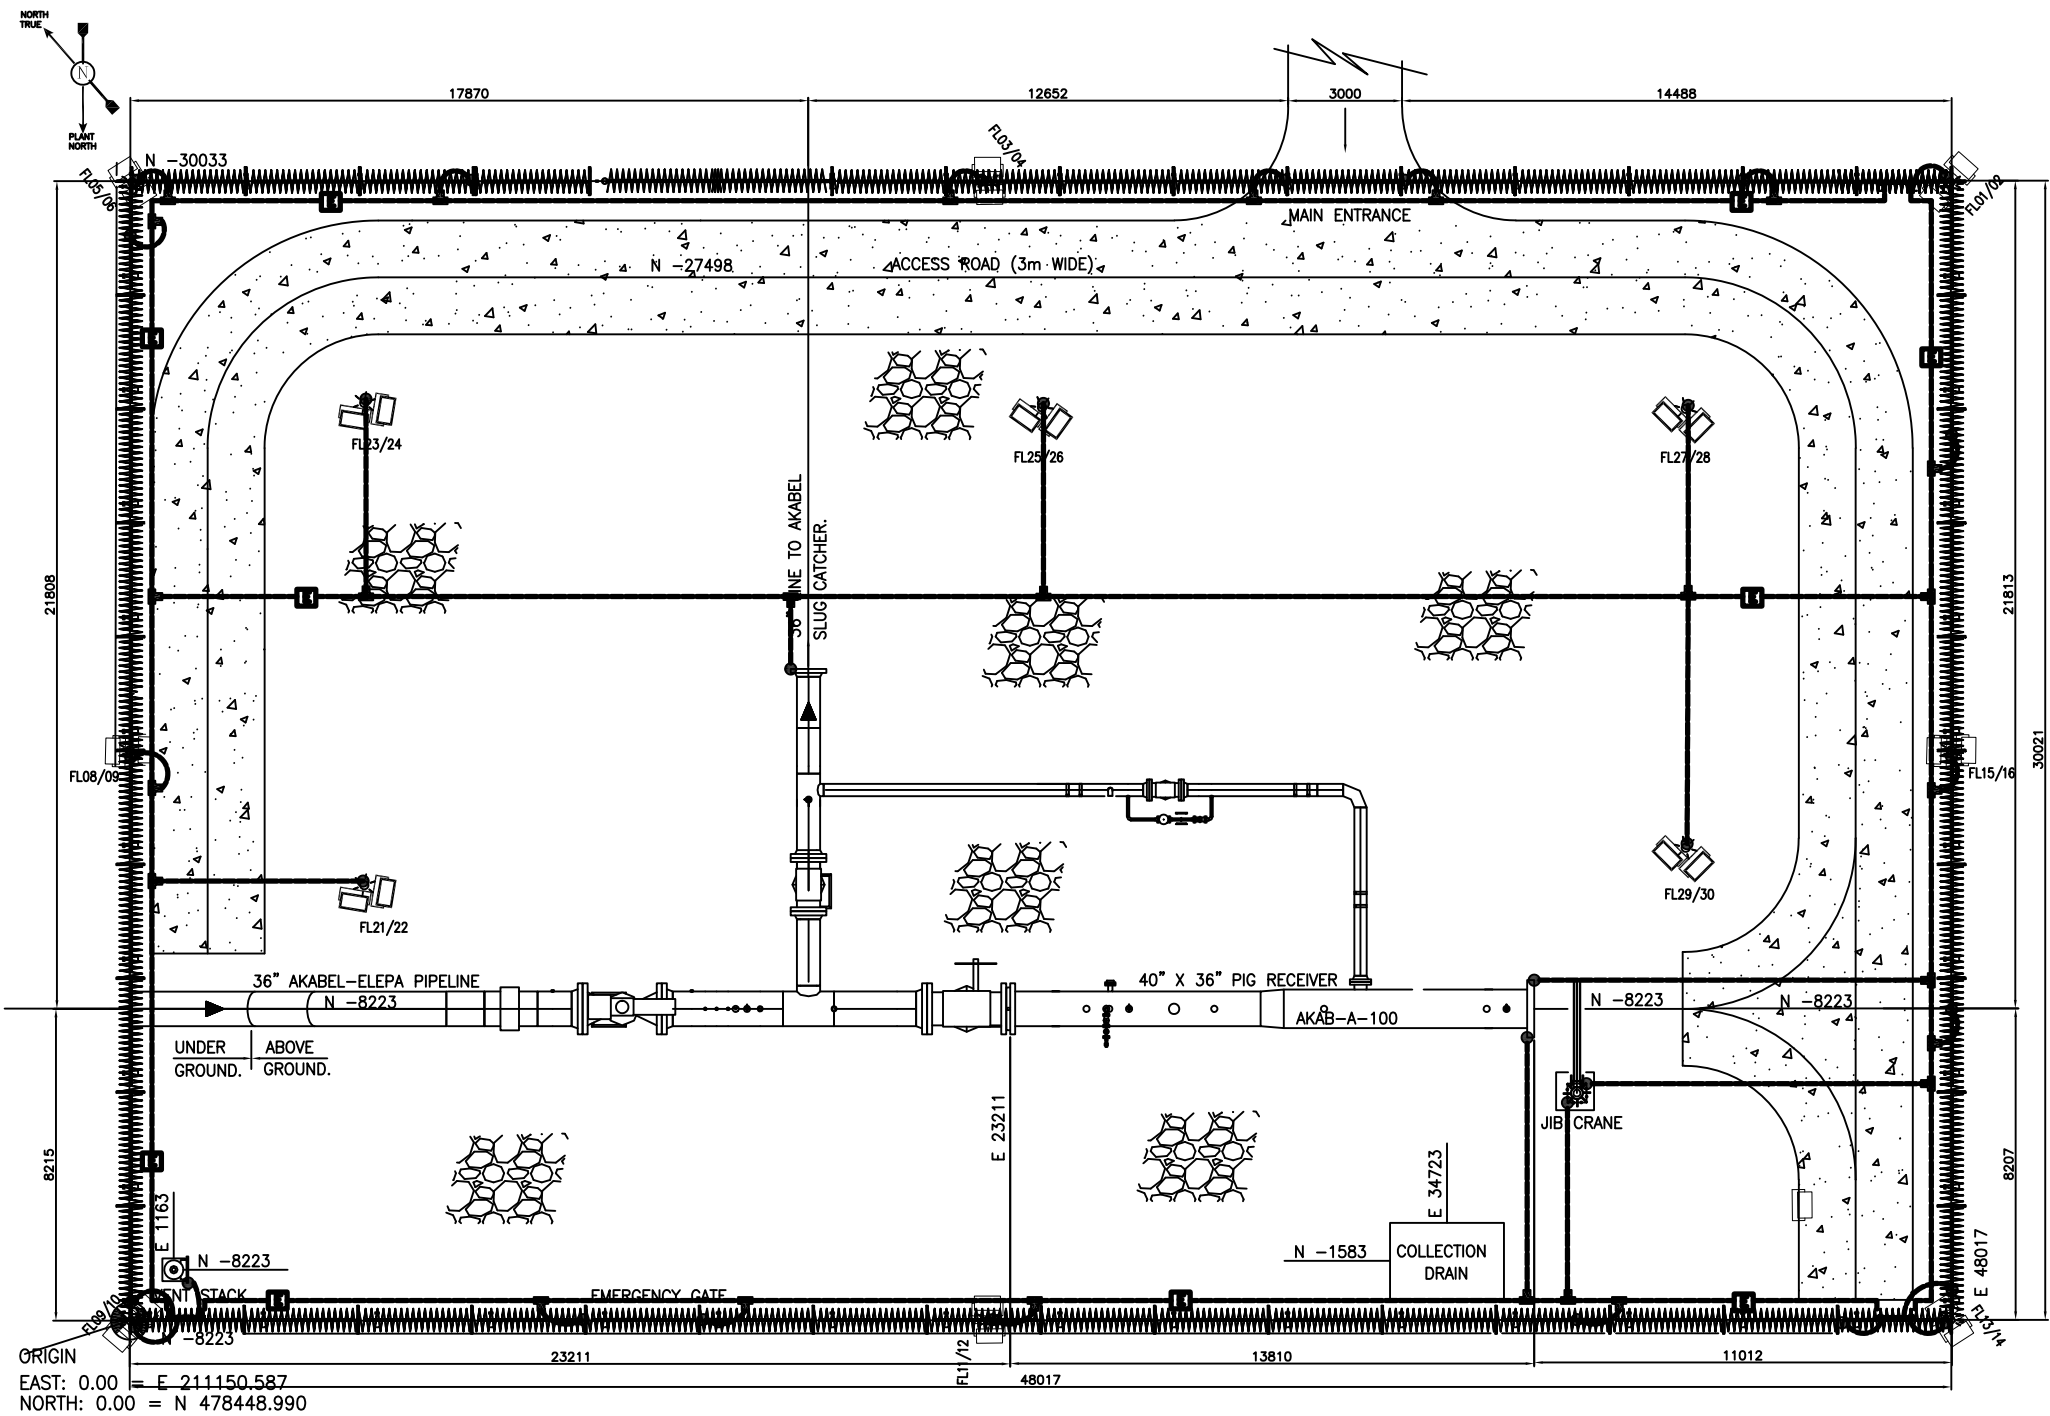


BILL OF MATERIALS

SL.NO.	SYMBOL	DESCRIPTION	QTY. (APPROXIMATE)
1		70 mm² PVC INSULATED YELLOW/GREEN COPPER CABLE	224Mtrs.
2		COMPRESSION CONNECTOR-70 TO 70 mm² 3-WAY	30Nos.
3		8-WAY ELECTRICAL EARTH BUS	4Nos.
4		EQUIPMENT CONNECTION NODE WITH BOLTED BRANCH	33Nos.
5		EARTH PIT	10Nos.

- NOTE:
9. NO. OF EARTH BUS AND CONNECTION TO PILE STRUCTURE DECIDED IN SUCH A WAY THAT, SYSTEM EARTHING RESISTANCE SHALL BE ≤40.
 10. LIGHTNING ARRESTOR DOWN CONDUCTOR MESH TO BE PROVIDED ON ELECTRICAL ROOM IN NEXT REVISION.
 11. ALL ELECTRICAL INSTRUMENTATION & METALLIC EQUIPMENT IN THE ELECTRICAL ROOM TO BE BONDED.

REFERENCE DOCUMENT:

1. EQUIPMENT LAYOUT PLAN: MPP-DWG-019 Key Plan Akabel.

REFERENCE DRAWINGS		DRAWING No.	NOTES: 1. ALL DIMENSIONS ARE IN mm AND LEVELS IN METERS UNLESS SPECIFIED OTHERWISE . 2. EARTHING RODS SHALL BE COPPER BOND EARTH ROD OF 3/4" DIAMETER & 3000mm LENGTH. 3. GROUNDING GRID CONDUCTOR SHALL BE LAID IN CABLE TRAY BELOW FLOOR.. 4. INSTALLATION OF EARTHING GRID & CONNECTIONS SHALL BE IN COMPLIANCE WITH IEEE-80 & IEEE-142. 5. ALL METALLIC PARTS (STRUCTURES, STAIRS, VESSELS, ETC.) SHALL BE GENERALLY GROUNDED AT TWO POINTS. PIPE SLEEPER SHALL BE EARTHED AT 25MTR INTERVAL. 6. GROUNDING CONDUCTOR UNDER/IN CONCRETE SHALL BE LAID IN UPVC CONDUIT. 7. ALL EARTHING CABLES SHALL BE PVC INSULATED (YELLOW/GREEN) STRANDED COPPER CONDUCTOR. 8. LOCATION OF EARTHING CABLE & CONNECTION TO EACH EQUIPMENT IS INDICATIVE ONLY. ACTUAL LOCATION SHALL BE DECIDED AT SITE.	CONTRACTOR					BRASS FERTILIZER & PETROCHEMICAL COMPANY LIMITED				
									 GAS PROCESSING AND METHANOL COMPLEX PROJECT FEED FOR GAS GATHERING PIPELINES 				
				ENDORSEMENT					LOCATION AKABEL PIG RECEIVER EARTHING LAYOUT PLAN - AKABEL				
				RELEASED FOR	DESIGN ENGR.	BFPC TECH REP	SPDC TECH REP	DATE	DRAWN: N.K DATE: 23/07/2022 SHEET: 3 of 3				
									CHECKED: V.A DRAWING No. LA-BFPC-L-GPMC-GGPL-FEED-ELE-DWG-011				
									ENDORSED: A.D PROJECT No. 11998A				
									APP'D DATE: 22JUL2022 PROJECT No. -				
				COPY RIGHT RESERVED									