

GAS PROCESSING & METHANOL COMPLEX PROJECT NO. 11998A

Project	FEED for Gas Gathering Pipelines & Associated Infrastructure
Client	Brass Fertilizer and Petrochemical Company Limited
Originating Company	Epic Atlantic Limited
Document Title	Material Requisitions for Electrical Long Lead Items
Document Number	EA-BFPCL-GPMC-GGPL-FEED-ELE-LST-005
Document Revision	R01
Document Status	Issued for Review
Originator	Noel Kari
Security Classification	Restricted
Issue Date	10-Aug-22

Material Requisitions for Electrical Long Lead Items

R01	10.08.22	Issued for Review	N. Kari	V. Ani	A. Duru	
Rev #	Issue Date	Status Description	Originator	Reviewer	Approver (Epic)	Approver (BFPCL)

Revision History

Rev No.	Date	Description of Revision
R01	10.08.22	Issued for Review

Revision Philosophy:

- a. All documents for review shall be issued at R01, with subsequent R02, R03, etc as required.
- b. All documents approved for issue or approved for design shall be issued at A01 with subsequent A02, A03, etc. as required. (Management of Change is required for A02, A03, etc.)
for the subsequent project phases, post FEED, it is expected that:
- c. All Detailed Design documents for review shall be issued at D01, with subsequent D02, D03, etc. as required.
- d. All documents approved for construction shall be issued at C01 with subsequent C02, C03, etc. as required. (Management of Change is required for C02, C03, etc.)
- e. All approved "As-Built" documents shall be issued at Z01, with subsequent Z02, Z03, etc as required. (Use versions Z01.1, Z01.2, Z01.3, etc to review the "As-Built" document to Z02).

Restricted

This document is made available subject to the condition that the recipient will neither use nor disclose the contents except as agreed in writing with the copyright owner. Copyright is vested in Brass Fertilizer and Petrochemical Company Limited (BFPCL) © All rights reserved.

Neither the whole nor any part of this document may be reproduced or distributed in any form or by any means (electronic, mechanical, reprographic, recording, or otherwise) without the prior written consent of the copyright owner.

SUMMARY PAGE

Client:	Brass Fertilizer & Petrochemical Company Limited	
Project:	Gas Processing & Methanol Complex	Project No. 11998A
Facility:	Gas Gathering Pipelines & Associated Infrastructure	Doc No. EA-BFPCL-GPMC-GGPL-FEED-ELE-LST-005
The administration of this document is in respect of FEED for Gas Gathering Pipelines & Associated Infrastructure for the Gas Processing & Methanol Plant Project of BFPCL. The Pipelines will be implemented in two phases, - starting with BBOU & ELEP as Phase 1 and followed by NUNR, SEIB & OPUG as Phase 2. The focus of the present FEED is on Phase 1, while Phase 2 will be implemented later. It is also a precursor and accompaniment to the FEED study & report that will lead to the project's FID and implementation. The report has relied on and used data and reference documents provided by the client, and if further documents and information become available, Epic Atlantic reserves the right to update the opinion set out in this report. For better appreciation, this document should be read in conjunction with the references listed below, which are the Concept Select Study reports that constitute basis for the Conceptual Study.		
KEYWORDS: BASIS OF DESIGN, PIPELINE, MANIFOLD, PLATFORM, MULTIPHASE FLOW, ROW, PTS		

REFERENCES	
Document No.	Description
EA-BFPCL-GPMG-GGPL-FEED-PSE-RPT-001	Upstream Gas Gathering Concept Select & Revalidation Report
EA-BFPCL/BFPP GAS PL/FEED-PRO-RPT-001	Preliminary Simulation – Based on Desktop Route Survey
EA/SPDC-BFPC UGS-GEP/CSM-RPT-002	Gas Gathering & Evacuation Pipelines Concept Screening
EA/SPDC-BFPC UGS-GEP/CSM-RPT-001	Conceptual Study Memorandum
EA-BFPCL-GPMC-GGPL-FEED-GEN-RPT-002	Basis of Design
EA-BFPCL-GPMC-GGPL-FEED-ELE-DWG-015	Overall Key Single Line Diagram Power Supply Electrical Single Line Diagram - BBOU Electrical Single Line Diagram - ELEM Electrical Single Line Diagram - AKAB
EA-BFPCL-GPMC-GGPL-FEED-ELE-DSH-002	Data Sheets for Electrical Equipment
EA-BFPCL-GPMC-GGPL-FEED-ELE-SPC-002	Specifications for Electrical Equipment
	FISAS Draft ESIA Report (November 2020)

Table of Contents

Abbreviations	6
1. INTRODUCTION	7
1.1. Background Information	7
1.2. Purpose	8
2. REGULATIONS, CODES AND STANDARDS	8
3. SCOPE OF SUPPLY	10
3.1. Technical Notes	12
4. SCOPE OF WORK	14
4.1. General	14
4.2. Technical Coordination Meeting	14
4.3. Delivery Schedule	14
4.4. Project management	14
4.5. Engineering Services	14
4.6. Design Changes	15
4.7. Supply of spares as per Project Scope.	15
5. INFORMATION REQUIRED ALONG WITH BID	16
5.1. Deviations and Alternatives	16
6. SUPPLIER PROPOSAL SUBMITTAL	17
6.1. Supplier Proposal	17
6.2. Number of Copies	17
6.3. CLOSING DATE	17
6.4. SCHEDULE	17
ATTACHMENT A - TECHNICAL DOCUMENTS AND ATTACHMENTS	18
ATTACHMENT B - VENDOR DRAWING AND DATA REQUIREMENT LIST	19
ATTACHMENT C - TABLE OF COMPLIANCE	23
ATTACHMENT D - DEVIATION LIST	24
ATTACHMENT E -TECHNICAL CHECKLIST	25
ATTACHMENT F - INSPECTION AND TEST REQUIREMENTS	27

Abbreviations

Abbreviation	Meaning
CIF	Cost, Insurance and Freight
EPC	Engineering, Procurement and Construction
ITP	Inspection and Testing Plan
PO	Purchase Order
QA/QC	Quality Assurance and Quality Control
VPIS	Vendor Print Index & Schedule
UOM	Unit of Measurement
CIF	Cost, Insurance and Freight
IOM	Installation, Operation, Maintenance Manual
RFQ	Request for Quotation

1. Introduction

1.1. Background Information

Brass Fertilizer and Petrochemical Company Limited (BFPCL) is developing a 10,000 metric tonnes per day (MTPD) capacity greenfield methanol production facility in Akabel (Odioma), Brass LGA, Bayelsa state. The plant complex is to be based on natural gas feedstock from 5 SPDC fields in OMLs 33, 35 & 36.

The Project involves the development, construction, and operation of a plant comprising:

- Two trains of 5,000 MTPD methanol plant, producing a total of 10,000 MTPD of methanol
- 340 MMscfd Gas Processing Plant ("GPP"), which will extract NGL from the natural gas feedstock, prior to feeding the lean gas to the methanol plant.
- Gas gathering pipelines and associated manifolds transporting the natural gas from five fields, viz: Bubouwe Bou (BBOU), Elepa (ELEP), Nun River (NUNR), Seibou (SEIB), and Opugbene (OPUG) to the GPP at Akabel.
- Product Export Lines and SBM for the export of the methanol, and NGL of the GPP.
- All offsite, utility, and off-plot facilities (including product storage, internal power generation, steam generation, and export jetty) for the operation of the processing plants.

The Pipelines will be implemented in two phases, - starting with BBOU & ELEP as Phase 1 and followed by NUNR, SEIB & OPUG as Phase 2.

The focus of the present FEED is on Phase 1 as shown in figure 1 below, while Phase 2 will be implemented later.

TCE is the Project Management Consultant for the project.

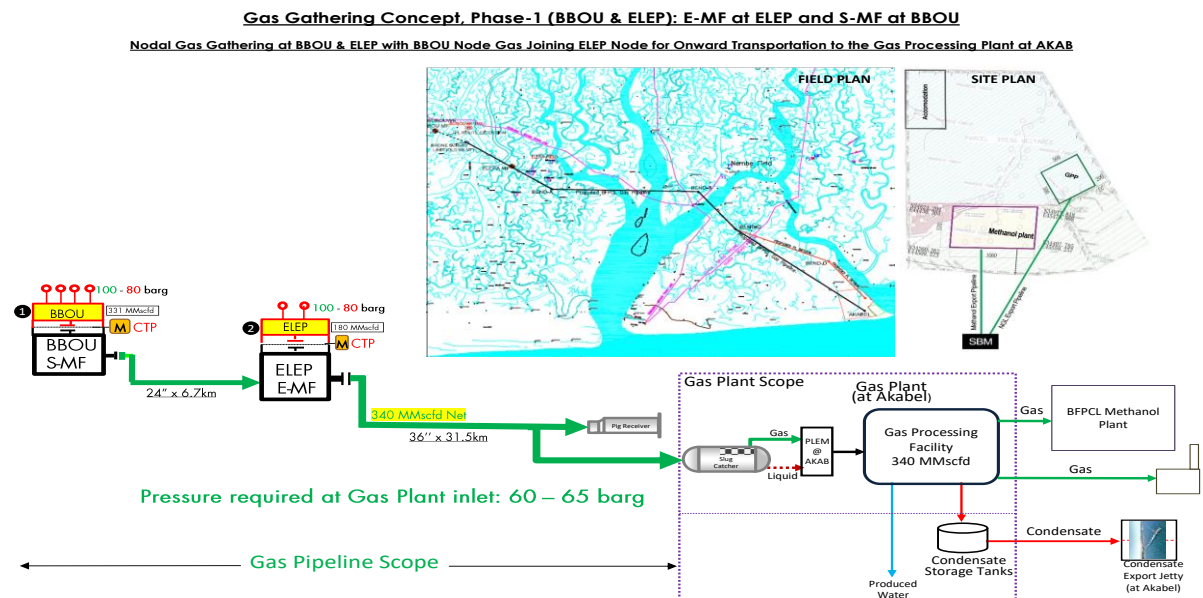


Figure 1: Gas Gathering Concept, Phase 1

1.2. Purpose

This Material Requisition covers the scope of supply of Electrical LLIs of the BBOU, ELEPA and AKABEL Manifolds Stations of the BFPCL Gas Gathering ProjectPhase 1.

This document shall be read in conjunction with the Project Specifications, Reference Documents, Datasheets and related Industry Codes and Standards.

The FEED shall fully comply with all specified relevant contractual requirements.

2. Regulations, Codes And Standards

Document Number	Document Title
IEC 60086	Primary Batteries
IEC 60904	Photovoltaic Devices
IEC 61523	Delay and Power Calculation Standards
IEC 61537	Cable management – Cable tray systems and cable ladder systems
IEC 61727	Photovoltaic (PV) systems – Characteristics of the utility interface
IEC 61730	Photovoltaic modules
IEC 62108	Concentrator photovoltaic (CPV) modules and assemblies
IEC 62109	Safety of power converters for use in photovoltaic power system
IEC 62305	Protection Against Lightning: General principles
IEEE 1144	Recommended Practice for Sizing Nickel-Cadmium Batteries for Photovoltaic (PV) Systems
IEEE 1562	Guide for Array and Battery Sizing in Stand-Alone Photovoltaic Systems
BS EN 50521	Connector for photovoltaic system. Safety requirements and tests
BS EN 50618	Electrical cables for photovoltaic systems
IEC 60050	International Electrotechnical Vocabulary
IEC 60364	Electrical installations of buildings
IEC 60446	Wiring colours
IEC 60502	Power Cables with extruded insulation and their accessories for rated voltages from 1 kV ($U_m = 1.2kV$) up to 30 kV ($U_m = 36kV$)
IEC 60529	Degrees of protection provided by enclosures (IP Code)
IEC 61000	Electromagnetic compatibility (EMC)
IEC 61439	Low-Voltage distribution board and control gear assemblies
IEC 61641	Enclosed low-voltage distribution board and control gear assemblies
IEC 60898	Electrical Accessories. Circuit Breakers for Overcurrent Protection
IEC 61643	Surge protective devices connected to low-voltage power distribution systems
IEC 60598	Luminaires
ISO 9000	Quality Management System
NFPA 70	National Electrical Code
IEC 60086	Primary Batteries

The latest versions of the regulations, codes, and standards and extant amendments or supplements shall apply. Local laws regulating the oil and gas industry in Nigeria shall be strictly adhered to. The order of precedence for the documents shall be as follows:

- Nigerian Local Standards and Codes
- The Contract
- Project Specifications
- Employer's Standards
- Shell DEPs
- International Codes and Standards

In all cases, the most stringent shall apply except where constraints dictate otherwise.

Conflicts between specifications and referenced Codes and Standards or deviations thereof shall be referred in a Technical Query (TQ) to the EMPLOYER for resolution.

3. Scope of Supply

- Sourcing of Material, Manufacture, Supply, Inspection and Testing, surface preparation for shipment, all necessary quality control and quality assurance incidental to the manufacture and supply of the Transformer & Switchboard, producing required documentation, handling, storage and shipping and providing total performance guarantee of the Transformer and Switchboard, in accordance with Project Specifications, Datasheets, international codes, standards and all applicable documents
- VENDOR shall provide all the equipment, labour, materials, and consumables required for the design, manufacturing, coating, inspection, testing, supply and delivery of the equipment. The table below shows the List of the LLIs Electrical Equipment within the scope of this requisition.

Table 1 - Scope of Supply

Item No.	Tag No.	Item Description	UOM	Quantity
1.	EQUIPMENT / MATERIAL			
		Labour, materials, equipment and consumables, precommissioning & commissioning for the engineering, design, fabrication, assembly, inspection, testing, quality control, quality assurance, coordination with All components of the equipment and shall be in accordance with relevant Engineering drawings & Standard. The supplier's scope of supply shall include the following as a minimum:		
1.1	1TR-01	350kVA, Dyn11, 6.6/11kV, Step-up Transformer located at Akabel Power Plant		1
1.2	RMU-01	200A, 11KV, 3PH, 3W, 50HZ, 21KA/3Sec, RE2d, Ring Main Unit.		4
1.3	TR-01	50kVA, Dyn11, 11/0.4kV, KNAN, OLTC, Step-down Transformer.		3

1.4	UPS-01	5kVA, 230VAC, 50HZ, Dual Redundant UPS including Battery Back-up of 80% load for 4hrs and dedicated UPS panel.		3
1.5	SB-01	120A MCCB, 4P INCOMER Switchboard with 400/230VAC, 120A, 50HZ, TPN+E, 15KA/1sec Bus Bar with OUTGOERS 9nos. 20A 4P, MCB, 2nos. 20A, 4P, MCP, 2nos spare 20A, 4P, MCB & 1no. spare 20A, 4P MCP		3
2	INSTALLATION AND COMMISSIONING SPARE PARTS			
2.1	Not Applicable			
3	TESTING AND INSPECTION			
3.1	-	Inspection and Testing for the equipment shall comply with the requirements of the under listed document and the applicable Industry Standard EA-BFPCL-GPMC-GGPL-FEED-ELE-SPC-002; Specifications for Electrical Equipment	Lot	1
3.2	-	All Manufacturer/Supplier Material Certificates Required as per Project Specification and Industry Standard	Lot	1
4	OTHER SERVICES (NON-MATERIAL DELIVERABLES)			

4.1	-	Engineering Services, as per requisition and Project specification.	Lot	1
4.2	-	Submission of Documents as per VPIS in Attachment-B	Lot	1
4.3	-	Surface preparation and protection Electrical Equipment for shipment shall be per Manufacturer standard	Lot	1
4.4	-	Preservation Suitable for road transport and multiple handling. Refer to EA-BFPCL-GPMC-GGPL-FEED-MPP-PRC-001; Equipment & Material Preservation Procedure. EA-BFPCL-GPMC-GGPL-FEED-QAC-PLN-001; Project Quality Management Plan (QA & QC)	Lot	1
4.5	-	Shipping Documents and Customs Clearance as per project requirements.	Lot	1
4.6	-	Meetings requirements (Kick-off, Progress, Vendor document review and TQs etc.)	Lot	1
4.7	-	Warranties/ guarantee as per Applicable Specification for Electrical Equipment and PO.	Lot	1
4.8		Estimated delivery term is CIF based on INCOTERMS 2020. (The delivery terms will be finalized before placement of PO).	Lot	1
4.9		All Electrical equipment supplied shall be from Company Approved Vendor & Sub Vendor List.	Lot	1
4.10		PMI for SS and Duplex material	N/A	1
5	OPTIONAL ITEMS			
5.1		Delivery CFR Nigerian Port basis	Lot	1
6	LIST OF EXCLUSIONS			
6.1		Installation at site/Erection	Lot	i
6.2		Foundation Design	N/A	

3.1. Technical Notes

All technical notes shall be read in conjunction with the following documents

- EA-BFPCL-GPMC-GGPL-FEED-ELE-SPC-002; Specifications for Electrical Equipment
- EA-BFPCL-GPMC-GGPL-FEED-ELE-DSH-002 Data Sheets for Electrical Equipment

4. Scope of Work

4.1. General

- Supplier's scope of work includes Sourcing of Material, Manufacture, Supply, Inspection and Testing, precommissioning, commissioning, qualifications, Painting, preparation and preservation for seaworthy transportation, producing required documentation, handling, storing and shipping and providing total performance guarantee of the electrical equipment, in accordance with data sheets, relevant Specifications, international codes, standards and all applicable documents.

4.2. Technical Coordination Meeting

- After the order is awarded, Supplier shall, upon receipt of purchaser's notice, send a sufficient number of qualified personnel to Company's office at Supplier's cost to hold the kick-off meeting not later than 2 week of purchase order and the design clarification meetings.

4.3. Delivery Schedule

Suppliers to submit the best delivery schedule for the electrical equipment. Delivery schedule offered by Suppliers will be one of the justification factors while Technical and Commercial Bid Analysis is performed by Company for the purposes of determining successful Supplier.

4.4. Project management

- VENDOR shall constitute a dedicated Project Team which shall coordinates all the activities and services throughout the Manufacturing and Supply cycle including establishment of overall Project Execution plan compliance with contractual, statutory & regulatory requirements and Technical/commercial logistic requirements.

4.5. Engineering Services

- The final design of Electrical equipment shall be the sole responsibility of the Manufacturer/Supplier. The Supplier shall ensure that the final design of the Electrical equipment complies fully with the design criteria as per project requirement and applicable specifications and data sheets. The Supplier shall also be responsible for the procurement of all materials, design certification, manufacturing, transportation, manufacturing of complete equipment and all necessary accessories.
- The VENDOR is responsible for the procurement, fabrication, inspection/testing, precommissioning, commissioning, supply, guarantee and documentation of all the equipment. This shall include, but not limited to:
 - a. Relevant Drawings and Documentation.
 - b. Resolving engineering technical queries relating to Electrical Equipment within the scope of

supply.

- c. Expediting services for the sub-contracted items. Ensuring that Sub-VENDORS shall adhere to project requirements specifications and datasheet.
- d. Participating in co-ordination meetings and kick-off meeting.

4.6. Design Changes

- Any design changes recommended by SUPPLIER, which shall affect the Purchase Order and/or Specifications, drawings, etc. shall be brought to CONTRACTOR through COMPANY's written approval before proceeding with the work.

4.7. Supply of spares as per Project Scope.

- Not Applicable

5. Information Required along with Bid

VENDOR shall submit all the details including applicable Specification for the equipment, Datasheet and Drawings completed with vendor offer, and other project documents in their technical offer.

Prospective VENDORS shall ensure that they do not undervalue the ratings, quality or quantity stated in the RFQ to make their offer competitive.

VENDOR shall include in the technical bid, his previous experience in the manufacture and procurement and supply of similar equipment.

5.1. Deviations and Alternatives

- The deviation list shall be prepared by VENDOR and shall be included in Vendor's bid/proposal (stamped and signed scan copy). in any case where VENDOR has no exceptions, VENDOR shall stamp and sign clearly stating "No Deviations" in VENDOR deviation form. Technical explanations for proposed deviations shall be included in VENDOR deviation form.
- VENDOR shall be responsible for any deviation or alternatives included in VENDOR'S bid/proposal and not stated in the deviation list. Any such hidden deviations shall not be entertained. Vendor is requested to submit filled in "Deviation List" and a completed technical checklist in the format provided.
- Assumptions, Alternatives, Deviations, Exceptions and Concessions raised shall be recorded and supplemented with adequate technical justifications. If no deviation list in the required format is furnished with the Bid, then it shall be construed that Vendor has no deviations to the requisition and its attachments and the Bid is in full compliance.
- After placement of Purchase Order, no deviation shall be acceptable from VENDOR.
- Vendor to provide the filled-out form as per Attachment C and Completed technical checklist along with bid.

6. Supplier proposal submittal

6.1. Supplier Proposal

- The Supplier shall prepare the proposal in accordance with the requirements set forth in the RFQ documents. Any proposal not conforming to the RFQ and attached documents may be disqualified. However, Supplier may submit his proposed deviations for consideration by Company.

6.2. Number of Copies

- The Supplier shall submit 1 (one) original and 2 (two) copies of the proposal, consist of:
 - a. Section 1:Cover Letter Stating the following:
 - SUPPLIER'S agreement with the Terms and Condition in the associated RFQ
 - Total value of quotation price (excluding VAT)
 - SUPPLIER'S statement that the work can be started immediately on issuance of Letter of Intent.
 - b. Section 2:Schedule of Prices
 - A Supplier shall submit detail of price breakdown and also summary of unit rates as required.
 - c. Section 3:Detail Schedule
 - SUPPLIER shall submit a detailed schedule for the work and/or delivery required to supply the quantity of data requested.
 - d. Section 4:Quality Control Requirement
 - SUPPLIER' Inspection and Test plan procedures to assure that quality of the materials meet the specifications
 - e. Section 5: Others (minimum as per the Data Sheet, Material Requisition for equipment)
 - In this section, SUPPLIER shall submit other documents requested by Company and other supporting documents for this requisition.

6.3. CLOSING DATE

- Supplier shall submit the proposal to Company within 2 (two) weeks after receiving the RFQ documents

6.4. SCHEDULE

- Contractor requires delivery completed in 3 months. Suppliers to submit its best delivery schedule for the supply of the Electrical Equipment.

ATTACHMENT A - Technical Documents and Attachments

Table 2 - Technical Documents

Document No.	Description
EA-BFPCL-GPMC-GGPL-FEED-ELE-SPC-002	Specifications for Electrical Equipment
EA-BFPCL-GPMC-GGPL-FEED-ELE-DSH-002	Data Sheets for Electrical Equipment
EA-BFPCL-GPMC-GGPL-FEED-MPP-PRC-001	Equipment & Material Preservation Procedure.
EA-BFPCL-GPMC-GGPL-FEED-SCM-PLN-003	Procurement & Subcontracting Plan.
EA-BFPCL-GPMC-GGPL-FEED-HSE-PLN-001	Project HSE Plan
EA-BFPCL-GPMC-GGPL-FEED-QAC-PLN-001	Project Quality Management Plan (QA & QC)

ATTACHMENT B - Vendor Drawing and Data Requirement List

Table 3 - Vendor Drawings and Data Requirement List

Sr. No.	Drawing & Data Required	Electronic Copies required		Due Date **	Required for Final submission	Due Date	Nos of Copies	Due Date
		For Bid	For Approval *				For Data Book	
1.	Vendor Print Index & Schedule	Y	Y	2 Weeks	Y		3C + 3E Flash-Driver / HardDisk	
2.	Vendor / Manufacturer's Catalogue	Y	Y	2 Weeks	Y		3C + 3E Flash Driver / HardDisk	
3	Project baseline detailed schedule.	Y	Y	4 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
4	Supplier experience list	Y	Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
5	progress Measurement reports / charts			Weekly	Y		3C + 3E Flash Driver / Hard Disk	
6	Approved sub-vendor list (and places of manufacturing/ inspection)	Y	Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
7.	Project Quality Plan, QAC Procedures	Y	Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
8	Sub order schedule		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	

Sr. No.	Drawing & Data Required	Electronic Copies required		Due Date **	Re-quired for Final submission	Due Date	Nos of Copies	Due Date
		For Bid	For Approval *				For Data Book	
9	Preservation, packing, handling and shipping procedure	Y	Y	4 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
10	Detail fabrication drawings for main items		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
11	Insulation Resistance test, Winding resistance Test list		Y	3 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
12	Manufacturing Procedure Specification (MPS) Manufacturing procedure qualification test (MPQT) results, manufacturing procedure qualification test (MPQT) results		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
13	Inspection and Test Plan	Y	Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
14	Primary Injection Test and test procedure		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
15	Secondary injection Test & Test procedure		Y	3 week before inspection release note	Y		3C + 3E Flash Driver / Hard Disk	

Sr. No.	Drawing & Data Required	Electronic Copies required		Due Date **	Re-quired for Final submission	Due Date	Nos of Copies	Due Date
		For Bid	For Approval *				For Data Book	
16.	Material Test Re-		Y	1 week before inspection release note	Y		3C + 3E Flash Driver / Hard Disk	
17.	Short Circuit Test and test procedure.		Y	1 week before inspection release note	Y		3C + 3E Flash Driver / Hard Disk	
18	Deviations	Y		With Bid			3C + 3E Flash Driver / Hard Disk	
19.	Sub order copies (un-priced)			On regular basis	Y		3C + 3E Flash Driver / Hard Disk	
20.	PWHT Procedure, as applicable		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
21.	Certification Data Book		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
22.	Material test certificate as per EN 10204 as mentioned in Data Sheet		Y	4 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
23	Shipping Documents and Transport Authorization (Final Packing List + Packing Content + Commercial Invoice)		Y	6 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
24	Vendors Document control Manual		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	

Sr. No.	Drawing & Data Re-quired	Electronic Copies required		Due Date **	Re-quired for Final submission	Due Date	Nos of Copies	Due Date
		For Bid	For Approval *				For Data Book	
38	Project QA/QC record		Y	2 Weeks	Y		3C + 3E Flash Driver / Hard Disk	
25	Spare parts List for Erection, Pre-commissioning and Commissioning		N/A					
26	Two (2) Year Operating Spare Parts List		N/A					
27	Special Tools for Erection, Pre-Commissioning, Commissioning and Operation List		N/A					
* After P.O. ** From P.O. Date Legends: C: Copy E: Electronic Copy Note: 1. The above-mentioned documents are general requirements; the same shall be discussed and agreed with Company / its representative and Vendor, prior to Placement of Order. 2. Electronic copy required at all stages. 3. One copy of IOM document shall be submitted along with Package delivery.								

ATTACHMENT C - Table of Compliance

VENDOR shall confirm below the Sections of the Requisition/Specification that he has complied with/accepted or further clarifications are desired, or VENDOR has taken a deviation with reasons thereto. Columns 2, 3, and 4 must be answered and initialled.

Table 4 - Table of Compliance

1	2	3	4
Specification/Datasheet No.	*Conforms Yes/No	*Deviations Yes/No	@Clarification or Reasons for Deviations
EA-BFPCL-GPMC-GGPL-FEED-ELE-SPC-002; Specifications for Electrical Equipment			
EA-BFPCL-GPMC-GGPL-FEED-ELE-DSH-002 Data Sheets for Electrical Equipment			
Equipment & Material Preservation Procedure: EA-BFPCL-GPMC-GGPL-FEED-MPP-PRC-001			
Procurement & Subcontracting Plan: EA-BFPCL-GPMC-GGPL-FEED-SCM-PLN-003			
Project HSE Plan: EA-BFPCL-GPMC-GGPL-FEED-HSE-PLN-001			
Project Quality Management Plan (QA & QC): EA-BFPCL-GPMC-GGPL-FEED-QAC-PLN-001			

Notes:

- Acceptance (i.e. yes) implies total compliance to the Specifications.
- Provide additional explanatory sheets if required.
- Above are the main documents to be complied. However, compliance is required on all documents referenced in this requisition.

ATTACHMENT D - Deviation List

Table 5 - Deviation List

• sr. No	• Docu- ment	• Refer- ence/Par- agraph	• Devia- tion/Clari- fication	• Justification for Devia- tion/Clarifi- cation	• EPC Con- tractor Approval	• CON- PANY Ap- proval	• Remarks
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•

Notes:

In case of no deviations, VENDOR shall state "NO DEVIATIONS" with stamp and sign below.

- Deviations listed elsewhere in VENDOR's offer shall not be considered. VENDOR shall be responsible to comply at his own cost and time.
- Offers that do not include signed and stamped Deviation List shall be liable for rejection.
- No deviations from any part of this requisition are allowed unless stated in VENDOR's bid using the above format.

ATTACHMENT E -Technical Checklist

VENDOR shall ensure that the following minimum information is attached with their bid.

Table 6 - Technical Checklist

S. NO	DESCRIPTION	PLEASE REPLY YES/NO
1.	VENDOR to furnish Quotation Reference and Quotation	
2.	Completely filled in 'Table of Compliance'.	
3.	Deviations, if any, to the scope of work, specification, codes and standards attached/referred to in this requisition with proper reasoning.	
4.	Completely filled in data sheets.	
5.	Signed and Stamped Specifications	
6.	VENDOR's quality control documents (viz. Manufacturing, inspection and testing)	
7.	Compliance that delivery schedules and VENDOR's detailed order execution schedule is submitted.	
8.	QA/QC documents as required with bid.	
9.	List of Special Tools and Tackles (if applicable)	
10.	Supplier to Guarantee the performance parameters as per the specifications and datasheets.	
11.	Supplier to confirm that quality certificate of the manufacturer facility and quality plans/ inspection and test plans is furnished with the bid.	
12.	Any additional documents/data as required by Supplier.	
13.	Supplier to quote for all items (type & design etc.) as per material requisition scope of supply and duly filled in signed and stamped and attached with the Offer.	
14.	Supplier to confirm that the offer is in full compliance with all requirements of Inquiry notes, Specifications / Standards attached with Inquiry,	
15.	Supplier to confirm that Unit price, total price and delivery period has been filled in, in the Material Requisition Scope of Supply.	
16.	Supplier to confirm that quotation shall be applicable and valid for placement of order either in full or in part based on the unit rates quoted.	
17.	Supplier to confirm that shipping weights and volume has been mentioned in the offer.	

18.	Supplier to confirm that they are aware of all arrangements for testing and inspection, in compliance with the Inquiry/specification, at Supplier's work shall be done by them.	
19.	Supplier to indicate Spare part(s) for Two years continuous Operation, Commissioning spare(s) & Maintenance spare(s) (Itemized price list) if any	Not Applicable
20.	Supplier to confirm that they have indicated the country of origin and is aware that the certificate of origin shall be part of shipping documents.	
21.	Supplier shall indicate the Production / Delivery schedule. - All information submitted shall be in English language.	
22.	Supplier to confirm that they have attached technical catalogue or product brochure with the offer.	
23.	Supplier to attach their "Quality Management System" along with the quotation.	
24.	Supplier to confirm that the typical ITP (Inspection and Test Plan) for the quoted items has been attached along with the quotation.	
25.	Supplier to confirm that Certificates for ISO accreditation for Self and Sub Suppliers are attached with offer	
26.	Supplier to furnish the reference list for the past jobs executed with other customers along with customer name, project name, Items supplied qty of orders etc.	
27.	Supplier to state the warranty period and confirm that the materials shall be replaced at free of cost in case any manufacture/transit defects found during that period.	
28.	Supplier to confirm that the components quoted by them are suitable for the life span of 30 years.	
29.	Manufacturing/ Production Schedule.	
30.	Tagging/Stamping of Electrical Equipment shall be as per as provided by Company	
31.	VENDOR to indicate Country of Origin.	

ATTACHMENT F - Inspection and Test Requirements

RFQ No:	PO No:	VENDOR:	
Description and TAG No. REQUISITION FOR ELECTRICAL EQUIPMENT			

NOTE: FINAL CERTIFIED DRAWINGS AND DOCUMENTS MUST BE SUBMITTED WITHIN TWO WEEKS OF MANUFACTURING/FABRICATION AND TESTING COMPLETION

Table 7 - Inspection and Test Requirements

SCOPE: ELECTRICAL EQUIPMENT					Test and Inspection Requirements P. O. Specs and Respective Codes / Standards
1 Visual Inspection Witnessing by EPC Contractor and Company (Note-1)					
2 Certificates / Records to be Checked by EPC Contractor & Company (Note-1)					
3 Certificates / Data to Be Provided by VENDOR /Sub-Contractor					
01		X	X	01	Manufacturing procedure specification (MPS), Qualification Tests, as applicable
02		X	X	02	Material Test Reports, Certificate of Compliance for the Equipment
03	X	X	X	03	Positive Material testing, as applicable
04		X	X	04	Heat Treatment (Certificates), as Applicable
05		X	X	05	Heat Treatment (Charts), as Applicable
06	X	X	X	06	Qualification Records, as Applicable
07		X	X	07	Test Procedure Specifications, Procedure Qualification Records, as Applicable
08	X	X	X	08	Workmanship, Material, Surface Defects, Components, Dimensions
09		X	X	09	Compliance with Purchase Order Description, Specifications, Certified Drawings, VENDORS Catalogue Description
10		X	X	10	Quality Control Manual - Check for System Implementation
11		X	X	11	Painting/Coating Inspection, as Applicable
12		X	X	12	Insulation resistance test, as Applicable
13		X	X	13	Polarity test, as Applicable
14		X	X	14	Primary injection test, as Applicable
15		X	X	15	Others as per Specifications

SCOPE: ELECTRICAL EQUIPMENT				Test and Inspection Requirements P. O. Specs and Respective Codes / Standards	
1 Visual Inspection Witnessing by EPC Contractor and Company (Note-1)					
2 Certificates / Records to be Checked by EPC Contractor & Company (Note-1)					
3 Certificates / Data to Be Provided by VENDOR /Sub-Contractor					
Tests (As approved procedure)					
16	X	X	X	16	Dimensional & Visual checks on all Electrical Equipment
17		X	X	17	100 % Calibration / Configuration checking
18	X	X	X	18	100 % Functional Test
19		X	X	19	Testing of all other materials as per specification and all associated reference documents in this MR for more details
20	X	X	X	20	All key items and inspections and Tests as per the Project Specification & related Codes and Standards: • Testing of all Electrical Equipment • Mechanical Testing • Functional test operation • Painting /Protective Coating Inspection, etc.
Other Requirements					
21	X	X	X	21	Marking, Packing
22		X	X	22	Weighing
23		X	X	23	Compliance with Project Specification Requirements
24	X	X	X	24	Packing and Protection
25		X	X	25	Final Inspection and Issue of Release Note and Inspection Certification
26		X	X	26	Operating Manual, MRB, Installation and Maintenance manual
Inspection Level Required				I:	II: X
				III:	IV:
Notes: 1. VENDOR shall notify Company with min. (2) weeks in advance to witness the testing. 2. VENDOR to check the quality control requirement and Inspection Level in this table based on his experience, and further to advise, if there are deviations from VENDOR, VENDOR must seek Company approval and provide the relevant reason. Legend: X- Required					