



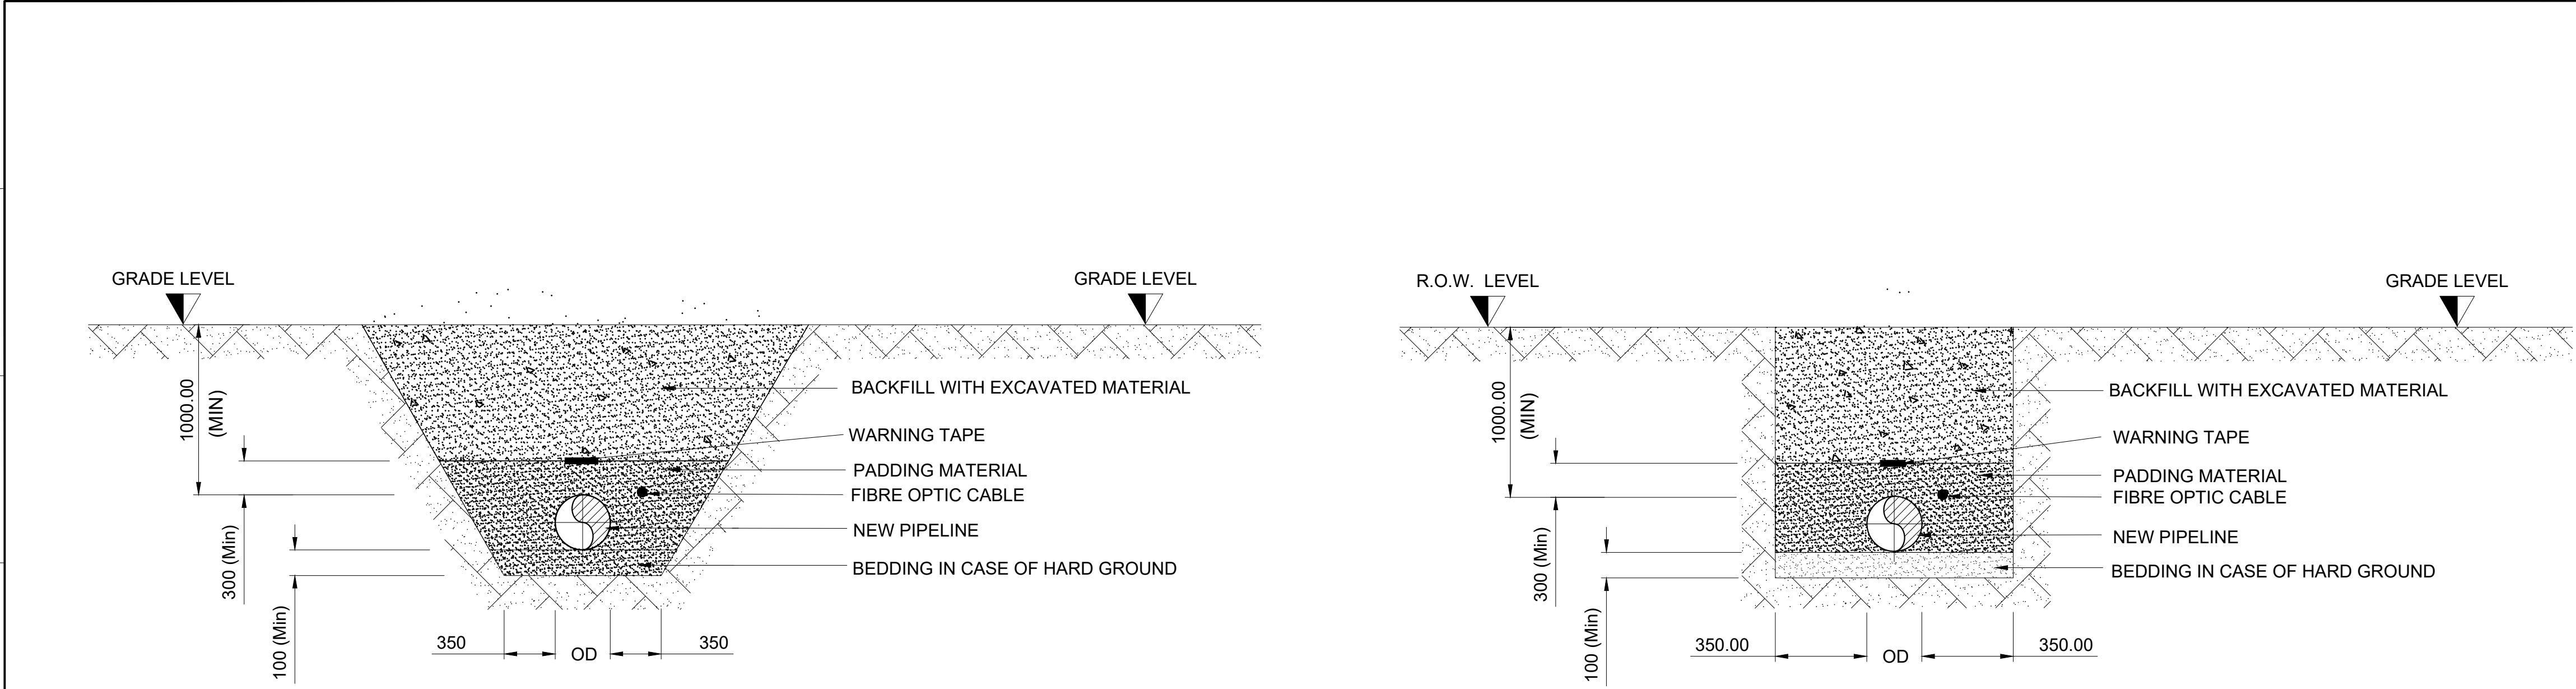


TRENCH IN NORMAL AREAS

TRENCH IN ROCKY AREAS (IF ANY)

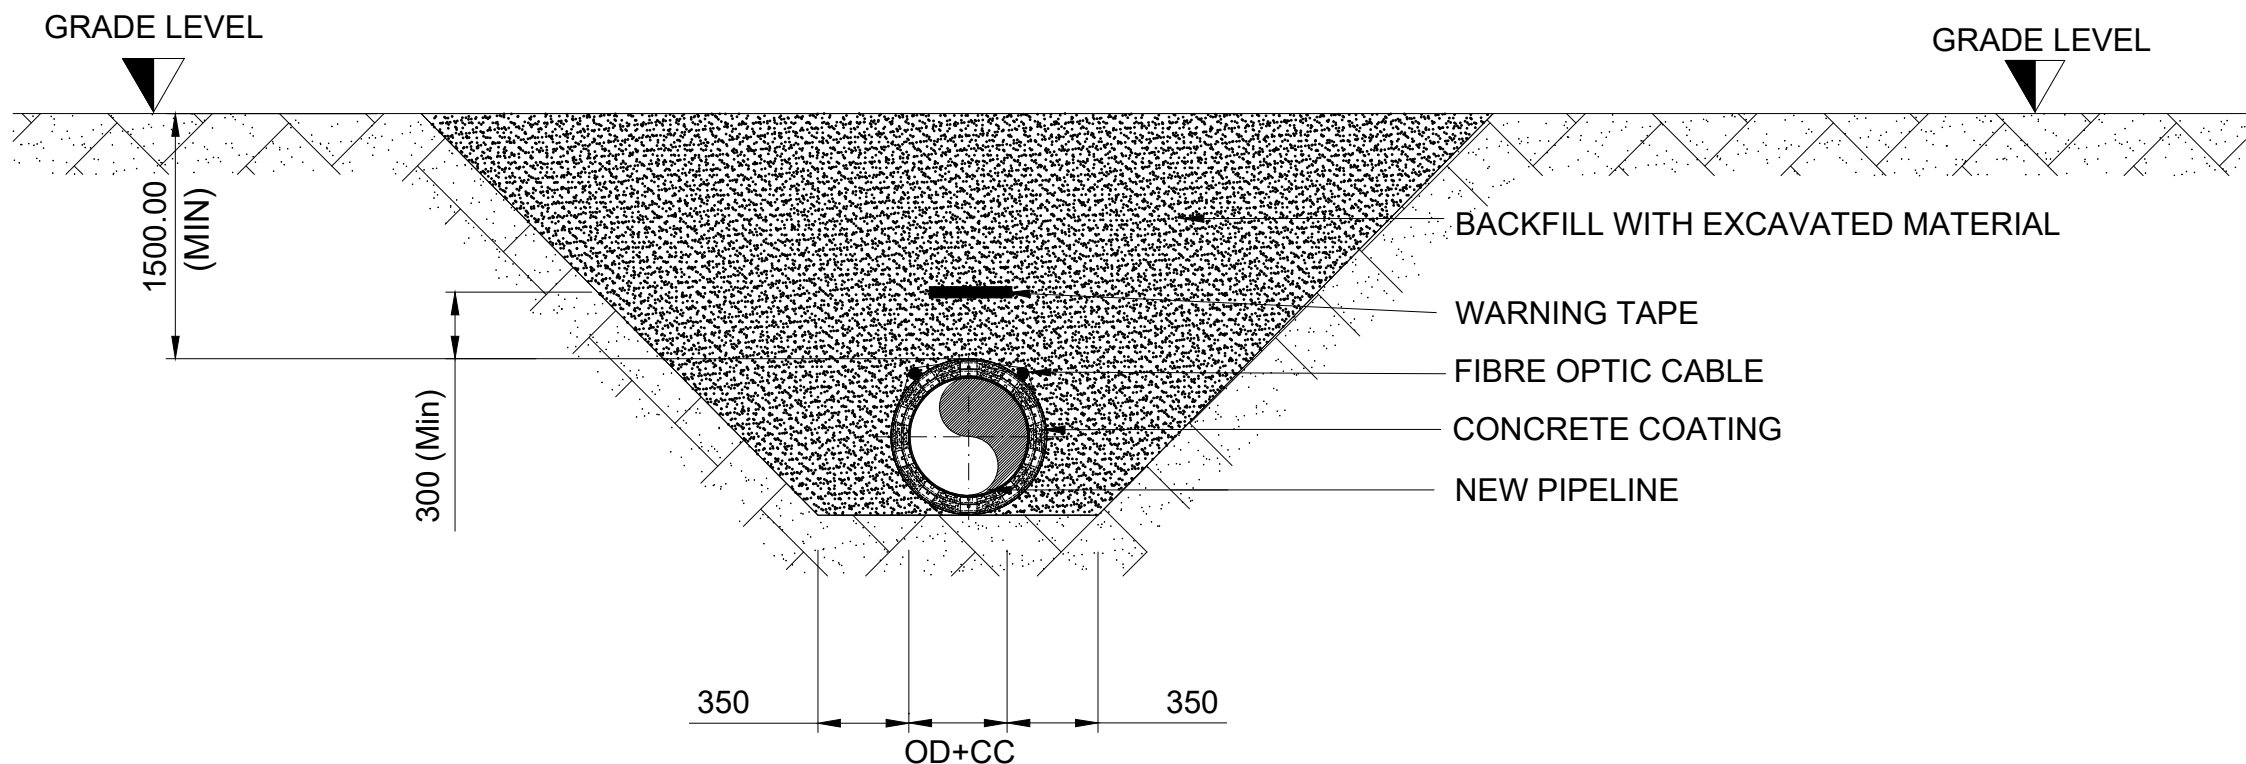

TRENCH IN SWAMP AREAS

- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETER UNLESS STATED OTHERWISE.
 - CONTRACTOR SHALL REINSTATE ALL AREAS AFFECTED BY THE CONSTRUCTION.
 - ROW SHALL BE PREPARED IN ACCORDANCE WITH THE PROJECT DOCUMENT, PIPELINE CONSTRUCTION AND HDD INSTALLATION SPECIFICATION.
 - TRENCH DIMENSIONS SHALL BE IN ACCORDANCE WITH RELEVANT TRENCH CONFIGURATION DETAIL.
 - BACKFILL MATERIAL SHALL NOT INCLUDE STONES, CRUSHED ROCK OR ANY ORGANIC MATERIALS.
 - CONSTRUCTION AND REINSTATEMENT TO BE IN ACCORDANCE WITH SPECIFICATION FOR PIPELINE CONSTRUCTION.
 - SLOPING OF TRENCH SHALL BE 45 DEGREE FOR MARSHY TERRAIN AND 60 DEGREE FOR HARD TERRAIN.
 - THE BOTTOM OF THE DITCH SHALL BE UNIFORMLY GRADED AND FREE FROM STONES, LOOSE ROCK OR OTHER OBJECTS, WHICH MIGHT DAMAGE THE PIPE COATING.
 - THE BACKFILL/CROWN OF THE TRENCH TOP DURING THE REINSTATEMENT ACTIVITIES SHALL BE IN ELEVATION WITH THE NATURAL LEVEL OF ADJACENT TOPOGRAPHY.
 - WARNING TAPE MUST BE INSTALLED ABOVE THE PADDING LAYER.
 - PADDING WILL BE DONE IN FIRST STEP UP TO THE LEVEL OF FOC AND THEN FINAL PADDING WILL BE DONE.

REFERENCE DRAWINGS		DRAWING No.		NOTES:										CONTRACTOR 		BRASS FERTILIZER & PETROCHEMICAL COMPANY LIMITED			
																 GAS PROCESSING AND METHANOL COMPLEX PROJECT FEED FOR GAS GATHERING PIPELINES 			
																LOCATION BOBOUWE BOU MANIFOLD, ELEPA MANIFOLD STATION AND AKABEL STATION TYPICAL DETAIL OF PIPE TRENCH			