NOTES :

1. ALL FIBRE OPTICS CABLE COMMUNICATION SHALL BE REDUNDANT.
2. CONVERTERS, PATCH CABLE AND ANY OTHER HARDWARE COMPONENT REQUIRED FOR THE FUNCTIONALITY OF THE FIBRE OPTIC COMMUNICATION SHALL BE CONSIDERED.
3. CONTROL AND SAFETY FUNCTIONS SHALL HAVE INDEPENDENT SYSTEM.
4. VSAT CONNECTIVITY TO SPDC OPERATIONS LOCATION FROM THE RTU.
5. SPDC TELECOM SYSTEM TO SPDC CENTRAL CONTROL ROOM.

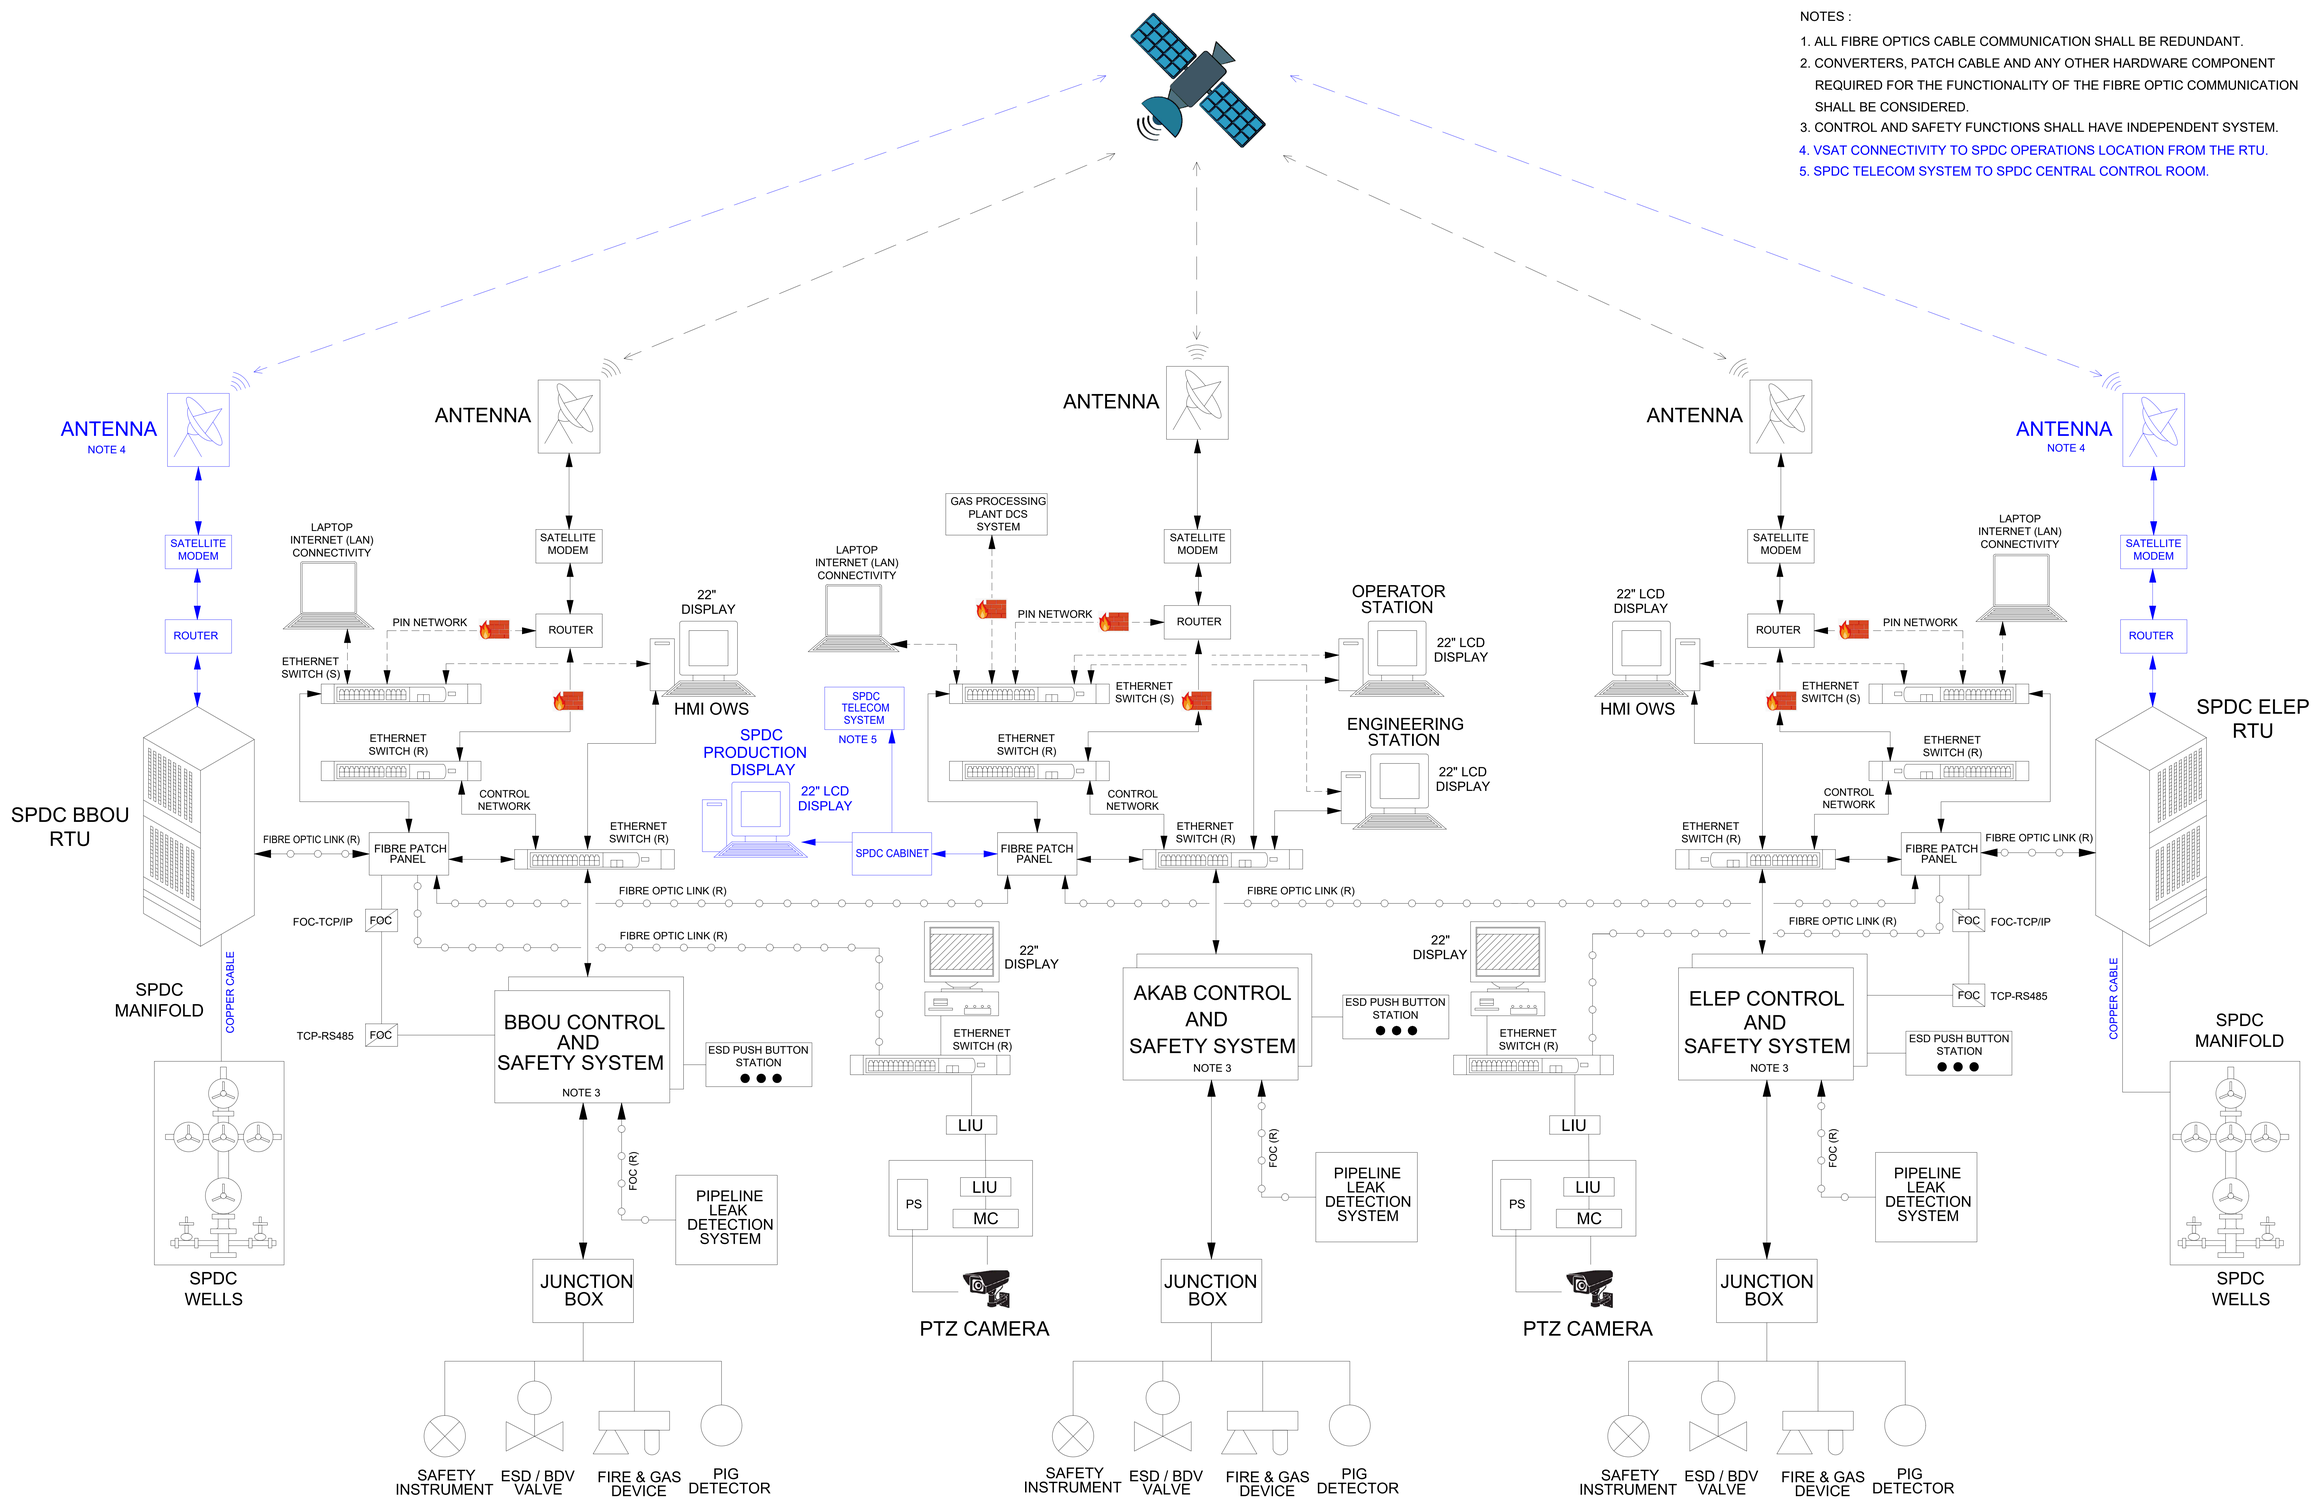

REFERENCE DRAWINGS	DRAWING No.

NOTES:

REV		DRAWN	CHK	END	DATE
R04	RE-ISSUED FOR REVIEW	KIRAN P.	PRINCE O.	KINGSLEY A.	19-10-22
R03	RE-ISSUED FOR REVIEW	KIRAN P.	PRINCE O.	KINGSLEY A.	26-07-22
R02	RE-ISSUED FOR REVIEW	KIRAN P.	PRINCE O.	KINGSLEY A.	01-07-22
R01	ISSUED FOR REVIEW	KIRAN P.	PRINCE O.	KINGSLEY A.	22-06-22

COPY RIGHT RESERVED

CONTRACTOR

ENDORSEMENT

RELEASED FOR	DESIGN ENGR.	BFPC TECH REP	SPDC TECH REP	DATE
–	–	–	–	–

BRASS FERTILIZER & PETROCHEMICAL COMPANY LIMITED

GAS PROCESSING AND METHANOL COMPLEX PROJECT
FEED FOR GAS GATHERING PIPELINES

ICSS SYSTEM OVERAL SYSTEM ARCHITECTURE FOR BBOU/ELEP/AKAB

DRAWN:	KIRAN P.	DATE: 19-10-2022	SHEET: 1 of 1
CHECKED:	PRINCE O.	DRAWING No. EA-BFCL-GPMC-GGPL-FEED-ICS-DWG-001	REV.
ENDORSED:	KINGSLEY. A.	PROJECT No. –	R04
APP'D DATE:	–	PROJECT No.	